



General Technical




Manufacturing Techniques

Parker Extruded fittings

Hexagon, round and shaped bars are extruded in the configuration required, drawn to size, cut to length and straightened. First a solid round billet (8 to 12 inches in diameter) is heated to the pliable state and forced by pressure of approximately 80,000 pounds per square inch through a die. The resulting continuous length of bar is cooled and then drawn through dies to the desired external size. (The drawing process also controls the temper.) After straightening, the bar is ready for machining.

The process produces a dense, nonporous material somewhat stronger in the longitudinal direction due to an orientated flow of the grain.

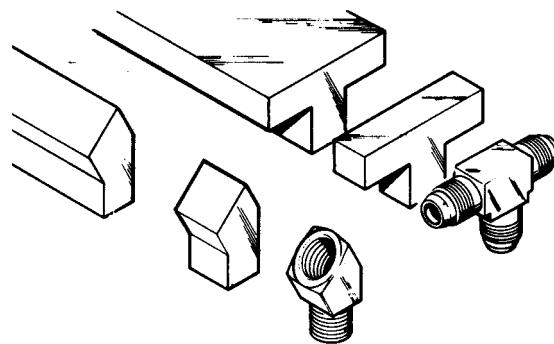

Material used for Parker Brass Fittings

(Reference SAE J461)


Straight bodies:	barstock CA 360 or CA 345
Shape bodies:	extruded barstock CA 360
Shape bodies:	forged CA 377
Nuts:	barstock CA 360
Nuts:	forged CA 377

Parker Forged Fittings

Material for forgings is extruded in round bars, cut to length and straightened. (At this point in the process, forging rod differs from round extruded machinable bars only in temper and chemical properties.) After straightening, the bars are cut again into slugs (short lengths), reheated to the pliable state and pressed under a pressure of approximately 25,000 pounds per square inch between upper and lower die cavities. After cooling the flash is trimmed away and the forging blank is ready for machining.

This process of forming under extreme pressure produces a uniformly dense material of exceptional strength. Because grain flow follows the contour, the fitting has high impact strength and is more resistant to mechanical shock and vibration.

Of the major brass fittings producers, only Parker offers elbows and tees machined from both extruded and forged shapes.

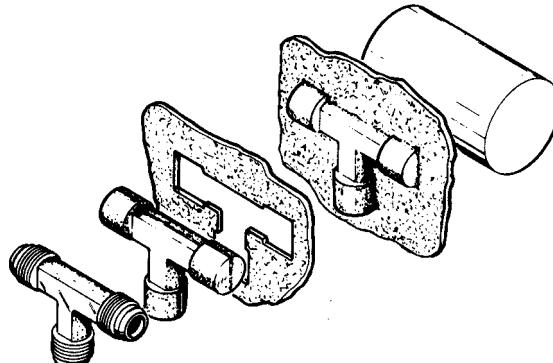

Tubing Compatibility Chart

Soft metal tubing			Parflex Thermoplastic Tubing										Product Sizes (inch)
Copper	Aluminum	Steel	Industrial Tubing Series (Outside Diameter Shown)										
			Polyethylene E & EB Inch (4.5,6,8,10) Metric (6.8,10,12)	Polyethylene PE Inch (2.2,5,3,4,5,6,8)	Polyethylene FRPE Inch (2.5,4,6,8)	Polyethylene HDPE Inch (4,6)	Nylon N Inch (2.2,5,3,4,5,6,8) Metric (4mm - 20mm)	Nylon PAT Inch (2.4,5,8,10,12)	Nylon NR Inch (2.3,4,5,6,8)	Polypropylene PP & PPB Inch (2.3,4,5,6,8,10)	Polyurethane U (90 - 95 Shore A) Inch (2.3,4,6,8,12) Metric (4,6,8,10,12)		
BS	BS		PS TS	PS TS	PS TS	PS TS	PS TS	PS TS	PS TS	PS TS	PS TS		Compression - Inch (2,3,4,5,6,7,8,10,12,14)
			TS	TS	TS	TS	TS	TS	TS	TS	TS		Compress-Align - Inch (2,3,4,5,6,8,10,12,14,16)
			TS	TS									Metru-Lok - Metric (4,6,8,10,12,14,16,18,22)
							BS				BS		Poly-Tite - Inch (2,3,4,5,6,8)
			TS	TS	TS	TS	TS	TS	TS	TS	TS		Hi-Duty - Inch (2,3,4,5,6,8,10)
													45 degree flare - Inch (2,3,4,5,6,8,10,12,14)
													Inverted Flare - Inch (2,3,4,5,6,8,10,12,14)
											TS		Fast & Tite - Inch (4,5,6,8,10)
													Flow Controls - Inch (2,2,5,4,5,6,8) Metric (4,6,8,10,12)
													Prestolok Brass - Inch (2,2,5,3,4,5,6,8) Metric (4,5,6,8,10,12,14)
													Prestolok Composite Inch (2,2,5,3,4,5,6,8) Metric (4,5,6,8,10,12,14)
													Liquifit - Inch (4,6,8)
											TS		TrueSeal - Inch (4,5,6,8)
											CL		Par-Barb - Inch (2,3,4,5,6,8,10,12)
													Dubl-Barb - Inch (2,5,4,6,8)
													Hose Barb - Inch (2,3,4,5,6,8,10,12,16) Inside Diameter
													Garden Hose
													NTA - Inch (3,4,6,8,10,12)
													Transmission Fittings - Inch (2,2,5)
													Air Brake - Inch (4,6,8,10,12,16)
													Air Brake Hose - Inch (6,8)
													Vibra-Lok - Inch (2,3,4,5,6,8,10,12)
													Prestomatic - Inch (2,2,5,3,4,6,8,10,12) Metric (6,8,10,12,16)
													PTC - Inch (4,6,8,10,12)
													SAE Cartridges - Inch (2,5,4,6,8,10,12)
													Manifolds - Inch (4,6,8)

N

Tubing Compatibility Chart

PS = Plastic sleeve & tube support recommended
 TS = Tube support is recommended
 BS = Brass sleeve recommended
 CL = Clamp required

Product Sizes (inch)		Parflex Thermoplastic Tubing							IHP/HPD Hose		Parflex/Atlantic Fluoropolymer Tubing	
		Industrial Tubing Series (Outside Diameter Shown)				Transportation Tubing						
		Polyurethane HU & HUM (>95 Shore A) Inch (2,2.5,4,6,8,12) Metric (4,6,8,10,12)	Polyurethane LU (<90 Shore A) Inch (2,2.5,4,5)	Polyurethane FR (Weld Tubing) Inch (4,5,6,8)	Clear Vinyl Inch (1 1/8" - 2 1/2")	PFT Air Brake (SAE J844) Inch (2,2.5,3,4,5,6,8,10,12)	Air Brake DIN 74324 (Nylon 12) Metric (4,6,8,10,12,15,16,18)	PFT Diesel Fuel Sizes 4,6,8,10,12	HTFL Diesel Fuel Sizes 4,6,8,10,12	GPH General Purpose Inch (3,4,6,8,12) Inside Diameter	Parker 271 hose (SAE J1402) Inch (6,8) Inside Diameter	PFA Fluoropolymer Inch (3 32" - 1") Metric (4,6mm - 12mm)
Compression & Flare	Compression - Inch (2,3,4,5,6,7,8,10,12,14)										PS TS	PS TS
	Compress-Align - Inch (2,3,4,5,6,8,10,12,14,16)										TS	TS
	Metru-Lok - Metric (4,6,8,10,12,14,16,18,22)											
	Poly-Tite - Inch (2,3,4,5,6,8)				TS							
	Hi-Duty - Inch (2,3,4,5,6,8,10)											
	45 degree flare - Inch (2,3,4,5,6,8,10,12,14)											
	Inverted Flare - Inch (2,3,4,5,6,8,10,12,14)											
Push-to-Connect	Fast & Tite - Inch (4,5,6,8,10)	TS	TS		TS						PS TS	PS TS
	Flow Controls - Inch (2,2.5,4,5,6,8) Metric (4,6,8,10,12)		TS									
	Prestolok Brass - Inch (2,2.5,3,4,5,6,8) Metric (4,5,6,8,10,12,14)	TS										
	Prestolok Composite Inch (2,2.5,3,4,5,6,8) Metric (4,5,6,8,10,12,14)											
	Liquifit - Inch (4,6,8)											
	TrueSeal - Inch (4,5,6,8)	TS			TS							
Barb	Par-Barb - Inch (2,3,4,5,6,8,10,12)		CL		CL							
	Dubl-Barb - Inch (2,5,4,6,8)											
	Hose Barb - Inch (2,3,4,5,6,8,10,12,16) Inside Diameter				CL				CL			
	Garden Hose				CL				CL			
DOT Transportation	NTA - Inch (3,4,6,8,10,12)					CL						
	Transmission Fittings - Inch (2,2.5)											
	Air Brake - Inch (4,6,8,10,12,16)				CL							
	Air Brake Hose - Inch (6,8)											
	Vibra-Lok - Inch (2,3,4,5,6,8,10,12)											
	Prestomatic - Inch (2,2.5,3,4,6,8,10,12) Metric (6,8,10,12,16)				CL	CL	CL					
	PTC - Inch (4,6,8,10,12)				CL							
	SAE Cartridges - Inch (2,5,4,6,8,10,12)				CL		CL					
	Manifolds - Inch (4,6,8)				CL							

Tubing Compatibility Chart

Parflex/Atlantic Fluoropolymer Tubing		Polyflex Tubing		PS = Plastic sleeve & tube support recommended TS = Tube support is recommended BS = Brass sleeve recommended CL = Clamp required	
PTFE Fluoropolymer Inch (3/32" - 1") Metric (3mm - 16mm)	PVDF Fluoropolymer Inch (2,3,4,5,6,8,10,12,16)	TPU Polyurethane (52 shore D) Inch (2,2,5,3,4,5,6,8) Metric (3,4,6,8,10,16)	Polyamide (Nylon) Inch (2,3,4,5,6,8,10,12) Metric (3mm - 22mm)	Polyethylene Inch (2,4,6,8,10) Metric (4,6,8,10,12,16)	Product Sizes (inch)
PS TS			PS TS	PS TS	Compression - Inch (2,3,4,5,6,7,8,10,12,14)
TS			TS	TS	Compress-Align - Inch (2,3,4,5,6,8,10,12,14,16)
			TS		Metru-Lok - Metric (4,6,8,10,12,14,16,18,22)
			BS		Poly-Tite - Inch (2,3,4,5,6,8)
			TS	TS	Hi-Duty - Inch (2,3,4,5,6,8,10)
					45 degree flare - Inch (2,3,4,5,6,8,10,12,14)
					Inverted Flare - Inch (2,3,4,5,6,8,10,12,14)
					Fast & Tite - Inch (4,5,6,8,10)
					Flow Controls - Inch (2,2,5,4,5,6,8) Metric (4,6,8,10,12)
					Prestolok Brass - Inch (2,2,5,3,4,5,6,8) Metric (4,5,6,8,10,12,14)
					Prestolok Composite Inch (2,2,5,3,4,5,6,8) Metric (4,5,6,8,10,12,14)
					Liquifit - Inch (4,6,8)
					TrueSeal - Inch (4,5,6,8)
					Par-Barb - Inch (2,3,4,5,6,8,10,12)
					Dubl-Barb - Inch (2,5,4,6,8)
					Hose Barb - Inch (2,3,4,5,6,8,10,12,16) Inside Diameter
					Garden Hose
					NTA - Inch (3,4,6,8,10,12)
					Transmission Fittings - Inch (2,2,5)
					Air Brake - Inch (4,6,8,10,12,16)
					Air Brake Hose - Inch (6,8)
					Vibra-Lok - Inch (2,3,4,5,6,8,10,12)
					Prestomatic - Inch (2,2,5,3,4,6,8,10,12) Metric (6,8,10,12,16)
					PTC - Inch (4,6,8,10,12)
					SAE Cartridges - Inch (2,5,4,6,8,10,12)
					Manifolds - Inch (4,6,8)

Tube Line Fabrication Guide for Leak Free Systems

Every hydraulic, pneumatic and lubrication system requires some form of tube line fabrication and fitting installation for completion. Proper fabrication and installation are essential for the overall efficiency, leak free performance, and general appearance of any system.

Start by planning ahead. After sizing the tube lines and selecting the appropriate style of fitting, consider the following in the design of your system:

1. Accessibility of joints
2. Proper routing of lines
3. Adequate tube line supports
4. Available fabricating tools

N

Routing of Lines

Routing of lines is probably the most difficult yet most significant of these system design considerations. Proper routing involves getting a connecting line from one point to another through the most logical path.

Always try to leave fitting joints as accessible as possible. Hard to reach joints are hard to assemble and tighten properly. Inaccessible joints are also more difficult and time consuming to service.

The most logical path should have the following characteristics:

- **Avoid excessive strain on joint** — A strained joint will eventually leak. (See Figures A14 through A21.)
- **Allow for expansion and contraction** — Use a "U" bend or a hose in long lines to allow for expansion and contraction. (See Figure A22.)
- **Allow for motion under load** — Even some apparently rigid systems do move under load. (See Figure A23.)
- **Get around obstructions without using excessive amount of 90° bends** — Pressure drop due to one 90° bend is greater than that due to two 45° bends. (See Figures A24 and A25.)
- **Keep tube lines away from components that require regular maintenance.** (See Figures A26 and A27.)
- **Have a neat appearance and allow for easy troubleshooting, maintenance and repair.** (See Figures A28 and A29.)

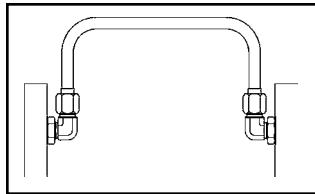


Fig. A14 — Correct Routing

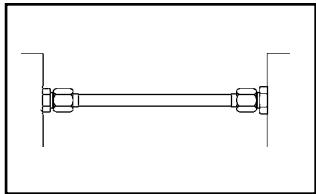


Fig. A15 — Incorrect Routing

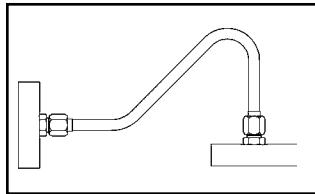


Fig. A16 — Correct Routing

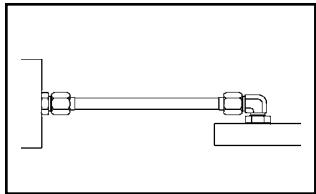


Fig. A17 — Incorrect Routing

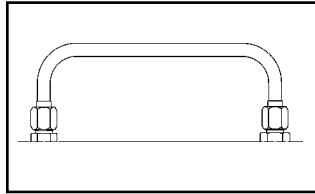


Fig. A18 — Correct Routing

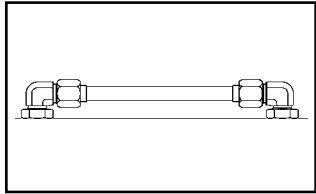


Fig. A19 — Incorrect Routing

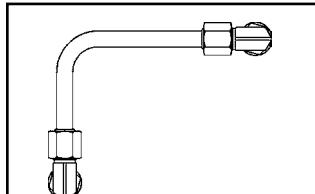


Fig. A20 — Correct Routing

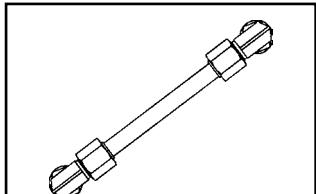


Fig. A21 — Incorrect Routing

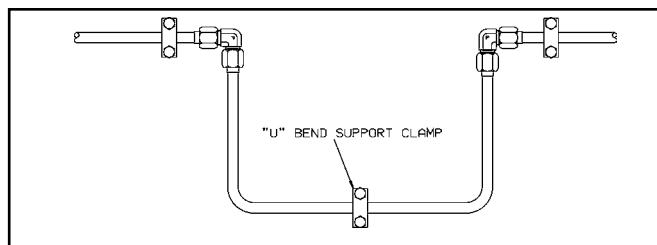


Fig. A22 — U-Bend Allowing Expansion and Contraction

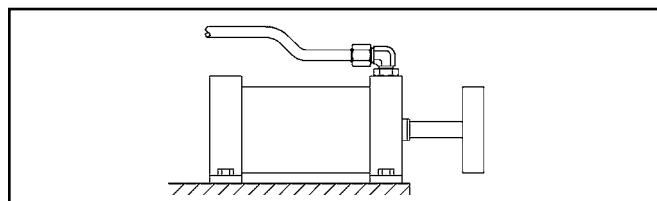


Fig. A23 — Bent Tube Allowing for Motion Under Load

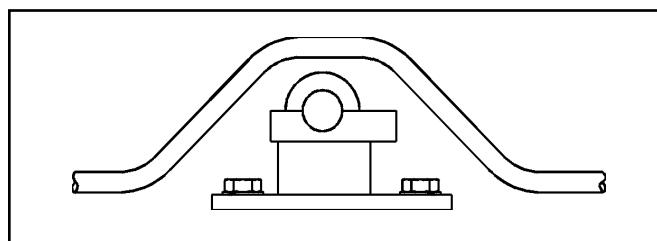


Fig. 24 — Correct

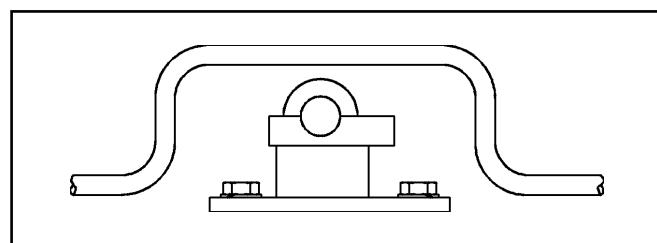


Fig. A25 — Incorrect

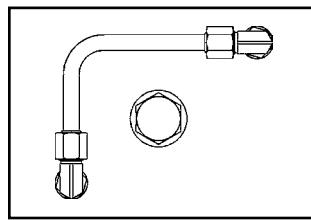


Fig. A26 — Correct

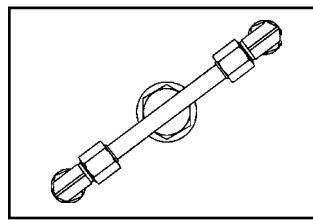


Fig. A27 — Incorrect

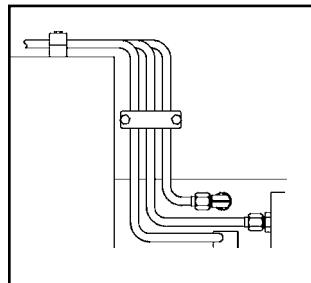


Fig. A28 — Correct


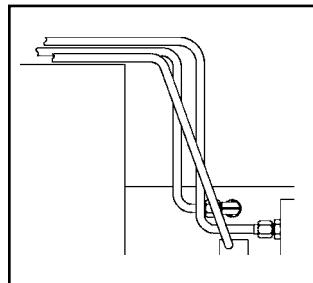


Fig. A29 — Incorrect

Thread Specifications

Dryseal Pipe Threads

All dryseal pipe threads are manufactured in accordance with the American National Standards Institute (ANSI) B1.20.3 specification and designed to seal pressure tight joints. The threads may incorporate the NPTF (National Standard Pipe Taper Fuel and Oil), PTF-SAE Short, PTF-SPL Short or PTF-SPL Extra Short form. Dryseal threads are used on brass products found within this catalog. Use of a thread sealant is recommended.

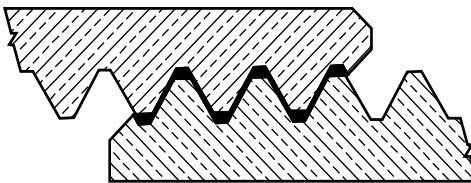


Dryseal Pipe Thread

Metal to metal contact. Crests of thread are crushed by the roots when wrench-tightened to form seal.

Non-Dryseal Pipe Threads

All non-dryseal pipe threads are manufactured in accordance with the American National Standards Institute (ANSI) B1.20.1 specification. These tapered pipe threads are used on our carbon and stainless steel products. Use of a thread sealant is recommended.

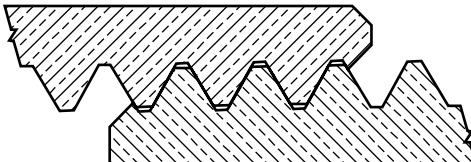

Non-Dryseal Pipe Thread

Flanks are in contact with possible clearance between the roots and crests. Will not prevent spiral leakage

Nickel Plating

Nickel plating is available for all standard product fittings. Plating will increase male pitch diameters and decrease female pitch diameters of threads. This will affect the assembly characteristics on standard products.

Nickel plating provides a corrosion resistant coating which is desirable in many applications. Electrolytic nickel plating is the standard plating supplied unless otherwise specified. This will provide a uniform coverage of external surfaces; however, internal surfaces may be uncoated.

Unified Threads

All threads in the columns headed "Straight Thread" found within this catalog are manufactured in accordance with the American National Standards Institute (ANSI) B1.1 specification.


British Standard Pipe Threads BSPT and BSPP

Pressure Tight

The British pipe threaded products found within this catalog intended for use where pressure tight joints are made on the threads are manufactured in accordance with British Standard (BS) 21 and International Standards Organization (ISO) 7-1. The threads are designated as follows:


- Rp: Internal parallel
- Rc: Internal taper
- Rs: Special external parallel
- R: External taper

Use of a thread sealant is recommended with the R series thread. An elastomeric peripheral seal should be used with the Rs thread.

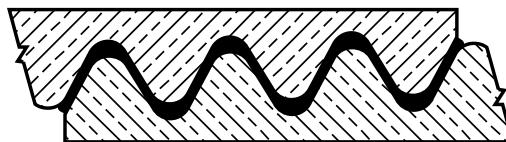

BS21 British Standard Pipe Thread for Pressure Tight Joints

Metal to metal contact provides seal as tapered thread is wrench-tightened.

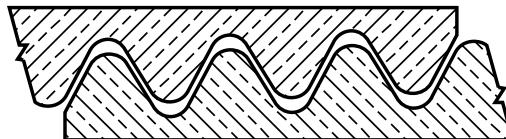

BS2779 British Standard Pipe Thread for Non-Pressure Tight Joints

Thread tolerances allow for possible clearance between threads. Will not prevent leakage paths.

Non-Pressure Tight

All British Standard parallel pipe threads manufactured in this catalog according to BS2779 and ISO 228-1 are intended for use where pressure tight joints are not made on the threads. An elastomeric peripheral seal should be used. These threads are designated as follows:

- G: Internal Thread
- GA: External thread, tight tolerance classification
- GB: External thread, general purpose and assumed if no classification designation is given

Pipe Thread Assembly

The two British Standard pipe thread forms used for Parker's standard product are manufactured in a tighter tolerance range than required by the standards in order to facilitate the assembly and mating of fittings produced by the two different standards. In general, BS21 threads do not necessarily mate with BS2779 threads at tolerance overlap conditions, but fittings located within this catalog can be assembled as follows:

External Thread	Mating Internal Thread
G-BS2779 (parallel)	G-BS2779 (parallel) Rp-BS21* (parallel)
Rs-BS21 (parallel)	Rp-BS21 (parallel) G-BS2779 (parallel)
R-BS21 (taper)	Rp-BS21 (parallel) Rc-BS21 (taper) G-BS2779 (parallel)

*This thread must be manufactured within a reduced tolerance range to always assemble with the G series external thread.

British Standard ISO Metric Screw Threads

They are commonly used in miniature pneumatic applications because of the availability of small thread diameters and are also used extensively in the automotive industry. There are two forms of sealing on metric screw threads.

- O-ring sealing into a profiled port in accordance with ISO 6149.
- Peripheral sealing with a copper or bonded washer in accordance with ISO 261 and 262.

Flaring Instructions

In order to properly flare copper tubing for use with Parker 45° Flared Fittings and Inverted Flared Fittings, the following procedures and specifications should be met in preparation and make-up of flares.

1) CUT TUBE WITH TUBE CUTTER:


To minimize the burr and workhardening, use a light feed on the cutting wheel and make several revolutions.

2) REAM THE TUBING:

Cutting with a tube cutter will always create a burr. The burr must be removed to obtain maximum sealing surface. Remove only the burr, do not remove material from the original wall thickness. Also clean the tube end thoroughly to remove burrs.

Peripheral sealing of parallel threads


Pressure-tight joints of screwed connections with parallel threads are achieved by placing a seal between the two machined faces

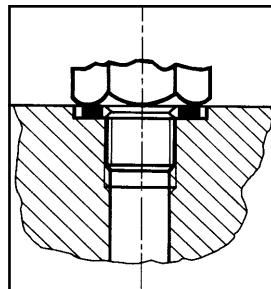

Flat seals


Washers and rings are manufactured in many different materials including copper, aluminium, fiber, plastics, etc.

The tightening torque at assembly must be carefully selected so as to avoid compressing the seal to the point of extrusion. As a general rule, the fitting should be tightened with an additional 1/4 wrench turn from the fingertight position.

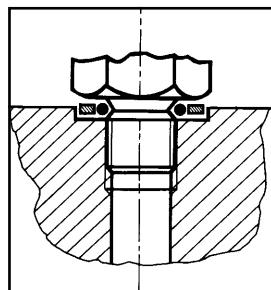

O-rings

Depending upon the configuration of the female port or male thread, O-Ring seals are fitted with or without back-up washers, and can be fully retained in a captive seal.

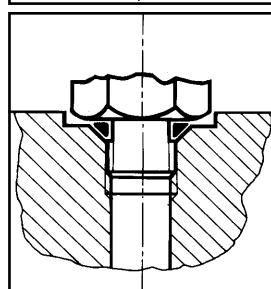


3) FLARE TUBING:

Flare with a compression or generating type flaring tool. Follow tool manufacturer's instructions for: (A) positioning the tube in tool and (B) for the correct number of turns on the feed handle.

4) INSPECT TUBING:

The flare cone should be checked for a smooth surface on the I.D. of the cone and measure with micrometer over largest O.D. for proper size. (See dimensions below for flare size for each tubing size.)

NOMINAL TUBE IN	A SINGLE FLARE DIAMETER		B SINGLE FLARE RADIUS	D SINGLE FLARE WALL THICKNESS
	IN		IN	IN
	MAX.	MIN.	+/- .01	MAX.
1/8	.181	.171	.02	.035
3/16	.249	.239	.02	.035
1/4	.325	.315	.02	.049
5/16	.404	.388	.02	.049
3/8	.487	.471	.02	.065
7/16	.561	.545	.02	.065
1/2	.623	.607	.02	.083
9/16	.676	.660	.02	.083
5/8	.748	.732	.02	.095
3/4	.916	.900	.02	.109
7/8	1.041	1.025	.02	.109
1	1.157	1.141	.02	.120

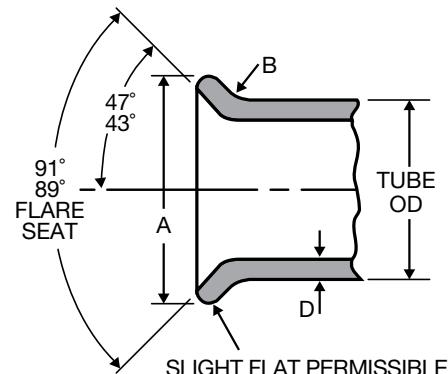

Thread Designations and Standards for Threads Used in Fluid Connectors

Abbreviation	Description	Applicable Std.
Straight Pipe		
NPSC	American Standard Straight Pipe Threads in Pipe Couplings Couplings	ANSI B1.20.1 FED-STD-H28/7
NPSF	Dryseal American Standard Fuel Internal Straight Pipe Threads (generally used in soft or ductile materials to mate with NPTF external taper threads)	SAE J476 ANSI B1.20.3 FED-STD-H28/8
NPSI	Dryseal American Intermediate Internal Straight Pipe Threads (for brittle or hard materials; intended to mate with PTF-SAE short external taper threads)	SAE J476 ANSI B1.20.3 FED-STD-H28/8
NPSM	American Standard Straight Pipe Threads for Free-Fitting Mechanical Joints for Fixtures (these threads fit freely over NPTF threads. They are used in swivel nuts of 07 adapters)	ANSI B1.20.1 FED-STD-H28/7
Taper Pipe		
ANPT	Aeronautical National Taper Pipe Threads (similar to NPT with various additional requirements in gaging)	MIL-P-7105
NPT	American Standard Taper Pipe Threads for General Use	ANSI B1.20.1 FED-STD-H28/7
NPTF	Dryseal American Standard Taper Pipe Threads (used in all of our steel and brass fittings)	SAE J476 ANSI B1.20.3 FED-STD-H28/8
PTF — SAE Short	Dryseal SAE Short Taper Pipe Threads (mainly used in low pressure pneumatic and fuel applications)	SAE J476 ANSI B1.20.3 FED-STD-H28/8
PTF — SPL Short ¹⁾	Dryseal Special Short Taper Pipe Threads	ANSI B1.20.3
PTF — SPL Extra Short ¹⁾	Dryseal Special Extra Short Taper Pipe Threads	ANSI B1.20.3
Unified Threads		
UN	Unified Constant Pitch Threads (standard series: 4, 6, 8, 12, 16, 20, 28, 32)	ANSI B1.1 FED-STD-H28/2
UNC	Unified Coarse Threads	ANSI B1.1 FED-STD-H28/2
UNEF	Unified Extra Fine Threads	ANSI B1.1 FED-STD-H28/2
UNF	Unified Fine Threads	ANSI B1.1 FED-STD-H28/2
UNS	Unified Special Pitch Threads	ANSI B1.1 FED-STD-H28/3
UNJ	Unified Controlled Root Radius Threads	ANSI B1.15 FED-STD-H28/4

Table A48 — Thread Designations and Standards for Threads Used in Fluid Connectors (continued on the next page)

- 1) Used in some pneumatic components where shortened thread depth is required because of lack of enough material due to component size limitations.

N

Abbreviation	Description	Applicable Std.
Metric Threads		
M	Metric Screw Threads — M profile	ISO 261 ANSI B1.13M FED-STD-H28/21
M — Keg	Metric Taper Threads (mainly used in Germany)	DIN 158
British Standard Pipe Threads		
R (BSPT)	British Standard Taper Pipe Threads, External	BS 21 ISO 7/1
Rc (BSPT)	British Standard Taper Pipe Threads, Internal	BS 21 ISO 7/1
Rp or G (BSPP)	British Standard Pipe (Parallel) Threads	BS 2779 ISO 228/1
Japanese Standard Pipe Threads		
PF ¹⁾	JIS Parallel Pipe Threads	JIS B202 ISO 228/1
PT ¹⁾	JIS Taper Pipe Threads	JIS B203 ISO 7/1
PS	JIS Parallel Internal Pipe Threads (to mate with PT threads)	JIS B203

Table A48 (Cont'd) — Thread Designations and Standards for Threads Used in Fluid Connectors

1) PF and PT threads are functionally interchangeable with BSPP and BSPT threads, respectively.
 These are old designations. They are being replaced with G (for PF) and R and Rc (for PT) as documents are revised.

Straight Thread Size Comparison Chart

	TUBE O.D.										
	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1
SAE 45°FLARED	5/16 -24	3/8 -24	7/16 -20	1/2 -20	5/8 -18	11/16 -16	3/4 -16	7/8 -14	1-1/16 -14	1-1/4 -12	-
INVERTED FLARED	5/16 -28	3/8 -24	7/16 -24	1/2 -20	5/8 -18	11/16 -18	3/4 -18	7/8 -18	1-1/16 -16	1-3/16 -16	-
AIR BRAKE/NTA	-	-	7/16 -24	-	17/32 -24	-	11/16 -20	13/16 -18	1 -18	-	1-1/4 -16
STANDARD, COMPRESSION / COMPRESS-ALIGN	5/16 -24	3/8 -24	7/16 -24	1/2 -24	9/16 -24	5/8 -24	11/16 -20	13/16 -18	1 -18	1-1/8 -18	1-1/4 -18
POLY-TITE			3/8 -24	7/16 -24	1/2 -24	-	11/16 -20	-	-	-	-
VIBRA-LOK	3/8 -24	-	1/2 -24	9/16 -24	5/8 -24	-	13/16 -18	1 -18	1-1/8 -18	-	-
V510 BALL VALVES	-	-	7/16 -20	-	9/16 -18	-	3/4 -16	7/8 -14	1-1/16 -12	-	1-5/16 -12
HI-DUTY FLARELESS TUBE FITTINGS	5/16 -24	3/8 -24	7/16 -20	1/2 -20	9/16 -20	-	11/16 -16	7/8 -18	-	-	-

S.A.E. Part Index

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
SAE 010101	H6	SAE 010203.....	H9	SAE 060103 BA.....	G7	SAE 100401 BA.....	E6
SAE 010102	H7	SAE 010302.....	H9	SAE 060110.....	G6	SAE 100424 BA.....	E7
SAE 010103	H7	SAE 010401.....	H8	SAE 060111.....	G6	SAE 100425 BA.....	E7
SAE 010104	H6	SAE 010424.....	H9	SAE 060115.....	G6	SAE 120101 BA	E12
SAE 010105	H10	SAE 010425.....	H8	SAE 060201 BA.....	G8	SAE 120102 BA	E12
SAE 010106	H10	SAE 010501.....	H8	SAE 060202 BA	G8	SAE 120103 BA	E12
SAE 010107	H10	SAE 040101.....	H12	SAE 060203 BA	G9	SAE 120111	E12
SAE 010108	H5	SAE 040102.....	H12	SAE 060401 BA.....	G8	SAE 120115	E12
SAE 010109	H10	SAE 040103.....	H12	SAE 060424 BA	G9	SAE 120201 BA	E12
SAE 010110	H6	SAE 040110.....	H12	SAE 060425 BA	G9	SAE 120202 BA	E13
SAE 010111	H6	SAE 040202.....	H13	SAE 100101 BA	E5	SAE 120203 BA	E13
SAE 010112	H10	SAE 040203.....	H13	SAE 100102 BA	E6	SAE 120302 BA	E13
SAE 010113	H5	SAE 040302.....	H13	SAE 100103 BA	E6	SAE 120401 BA	E12
SAE 010114	H5	SAE 040401.....	H12	SAE 100110	E5	SAE 120424 BA	E13
SAE 010165	H5	SAE 040424.....	H13	SAE 100115	E5	SAE 120425 BA	E13
SAE 010166	H5	SAE 040425.....	H13	SAE 100201 BA	E6		
SAE 010167	H5	SAE 040427.....	H13	SAE 100202 BA.....	E7		
SAE 010201	H9	SAE 060101 BA	G6	SAE 100203 BA.....	E7		
SAE 010202	H8	SAE 060102 BA	G7	SAE 100302 BA.....	E7		

SAE Standards (Current)

- J246:** Spherical and Flanged Sleeve (Compression) Tube Fittings
Tubing: Copper and J844 Nylon
Fittings: NTA and Air Brake
- J476:** Dryseal Pipe Threads
- J512:** Automotive Tube Fittings
Tubing: Copper and Nylon
Fittings: 45° Flare, Inverted Flare, Compression
- J513:** Refrigeration Tube Fittings
Tubing: Annealed Copper
Fittings: 45° Flare
- J530:** Automotive Pipe Fittings
Fittings: Pipe
- J531:** Automotive Pipe, Filler and Drain Plugs
Fittings: Pipe Plugs
- J844:** Nonmetallic Air Brake System Tubing
Tubing: Non-reinforced Type A, reinforced Type B
- J1131:** Performance Requirements for SAE J844 Nonmetallic
Tubing and Fitting
Assemblies Used in Automotive Air Brake Systems
Tubing: J844 Nylon
Fittings: NTA and Prestomatic
- J1615:** Thread Sealants
- J2494:** Brass Body Push-to-Connect Fittings
Tubing: J844 Nylon
Fittings: Prestomatic

U.L. LISTED FITTINGS

Many of the Fluid System Connectors Division's fittings have been listed by the Underwriter's Laboratory. The listings fall under 1 of 3 categories, depending upon application. Underwriter's requires that the smallest unit package carry the U.L. symbol and each carton be printed in accordance with the specification of each category.

List of U.L. Fittings


FITTINGS, FLAMMABLE LIQUID			
1F	62C	168CA	252IFHD
2GF	62CA	169C	256F
3GF	62CABH	169CA	259IFHD
14FL	62CBH	170C	264C
14FSV	66C	170CA	264CA
14FSX	66CA	171C	265C
41FL	68C	171CA	265CA
41FS	68CA	172C	269C
41FX	144F	172CA	269CA
41IF	145F	176C	270C
41IFS	147F	176CA	270CA
42F	149F	177C	639C
42IFHD	150F	177CA	639CA
46F	151F	244F	639F
46IFHD	155F	244IFHD	640F
48F	159F	245IFHD	660FHD
48IFHD	164C	249F	661FHD
60C	164CA	249IF	664FHD
61C	165C	249IFHD	
61CA	165CA	250IFHD	
61CL	168C	251IFHD	

FITTINGS, FUEL EQUIPMENT, MARINE			
2GF	144F	155F	664FHD
3GF	145F	159F	
14FL	147F	639F	
42F	149F	640F	
46F	150F	660FHD	
48F	151F	661FHD	

SHUT-OFF VALVES, FLAMMABLE LIQUIDS, LP GAS AND COMPRESS GAS			
XV520P-4	XV520P-20	XV500P-20	
XV520P-6	XV520P-24	XV500P-24	
XV520P-8	XV520P-32	XV500P-32	
XV520P-12	XV520P-40		
XV520P-16	XV520P-48		

Flow Curves

















87 psi █ Return Direction █ Controlled Direction N = Number of Turns F = Flow in SCFM

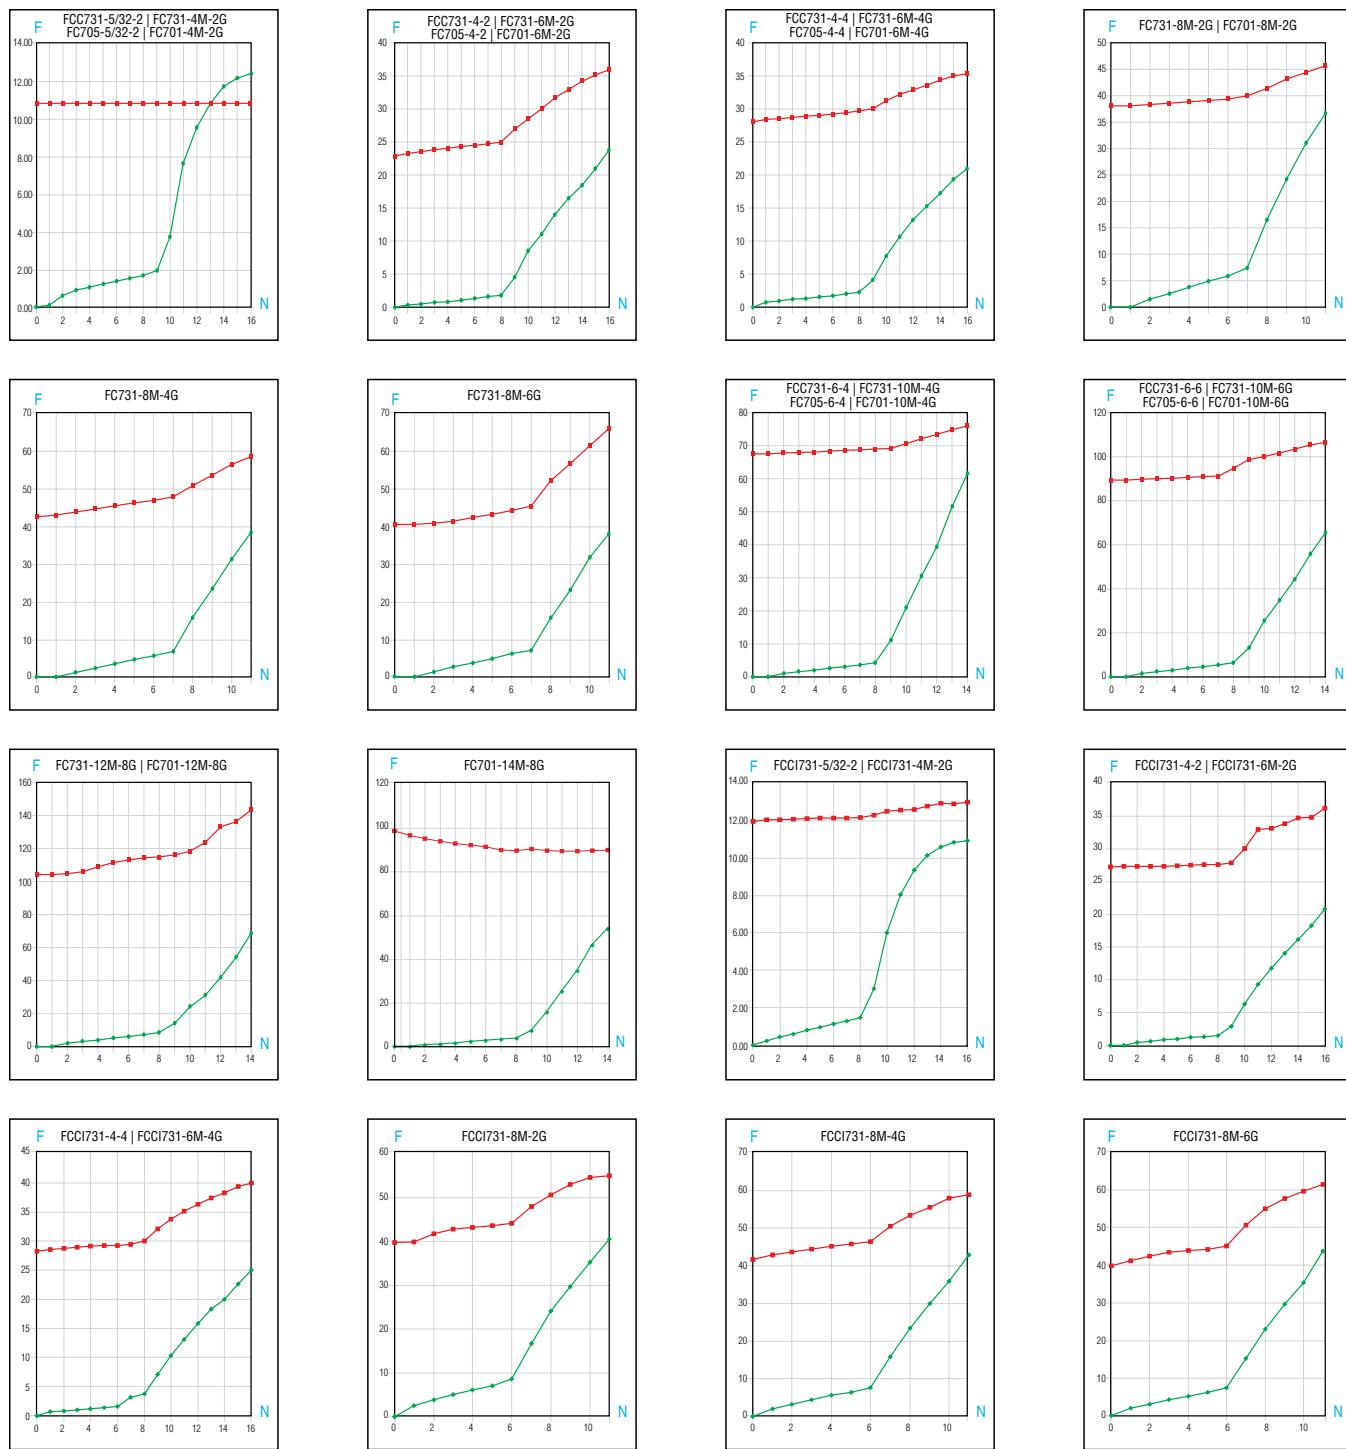

N

Flow Curves












87 psi █ Return Direction █ Controlled Direction N = Number of Turns F = Flow in SCFM

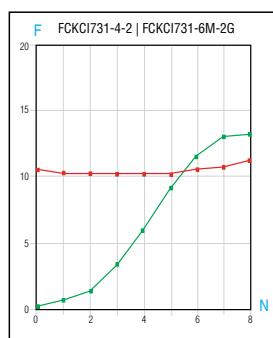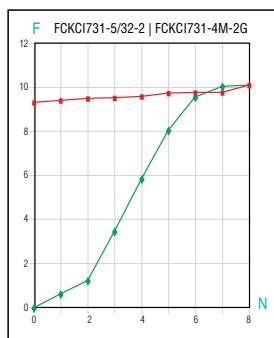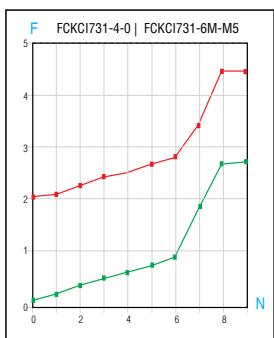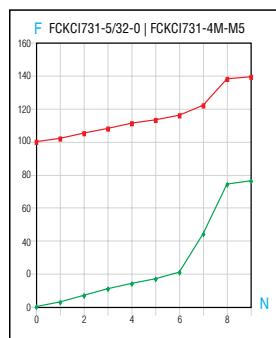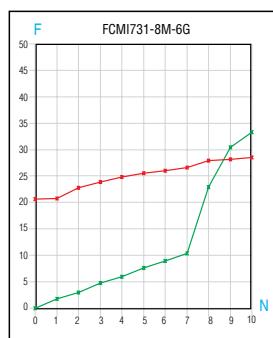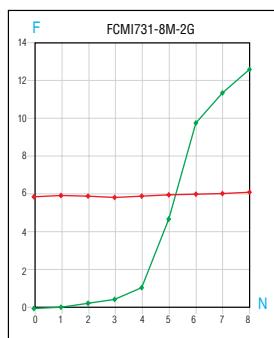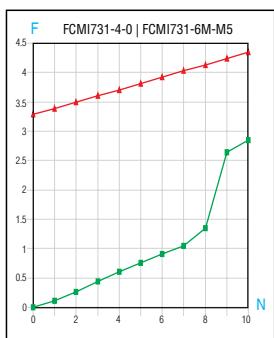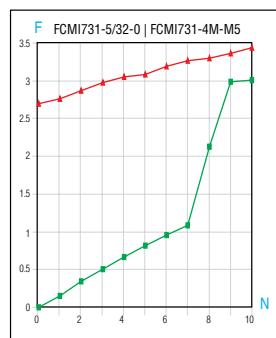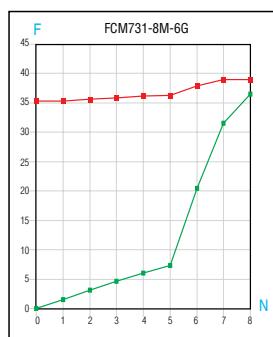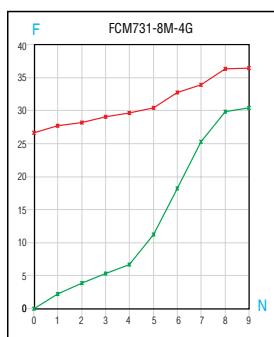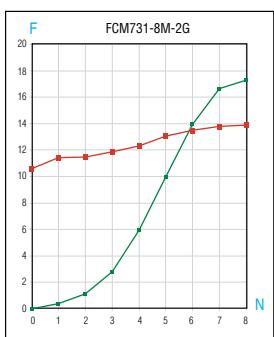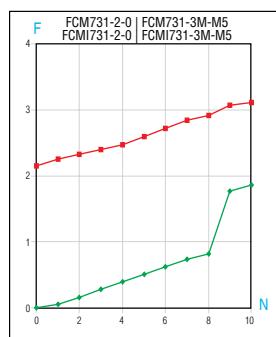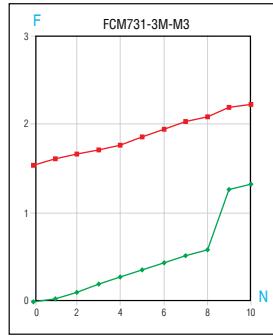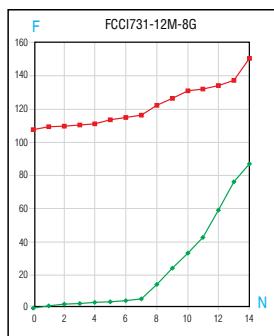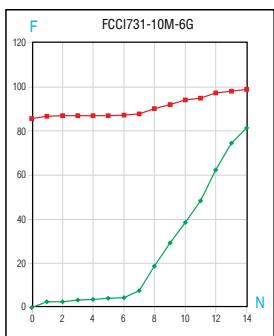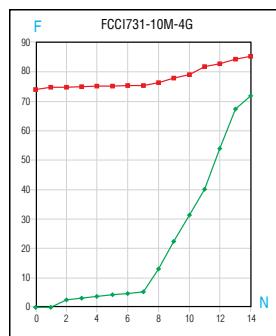

N


Flow Curves

87 psi █ Return Direction █ Controlled Direction N = Number of Turns F = Flow in SCFM

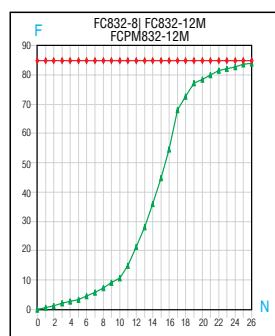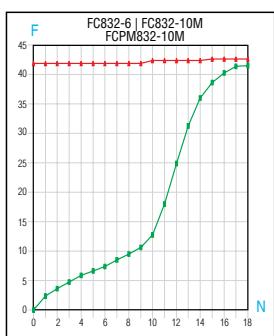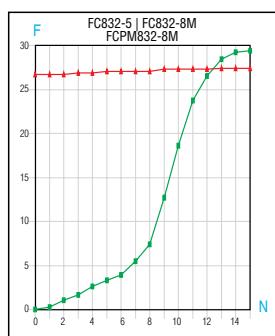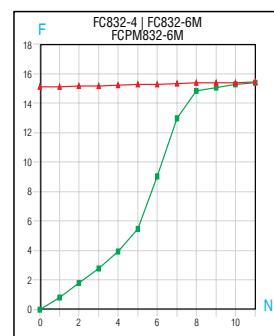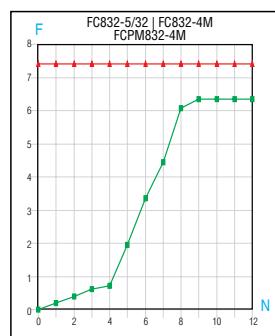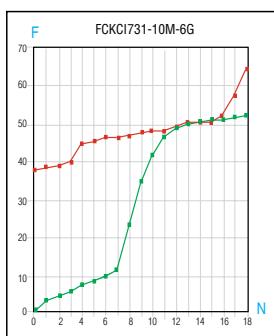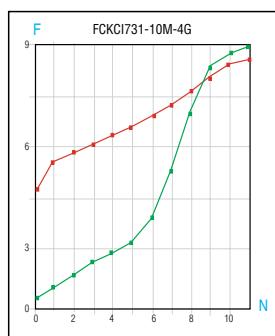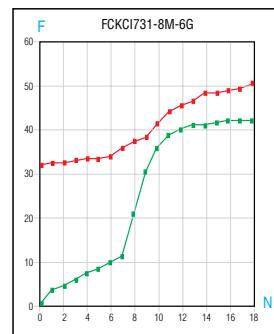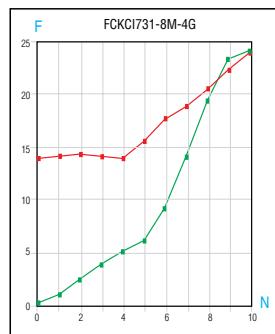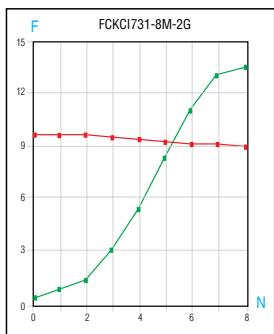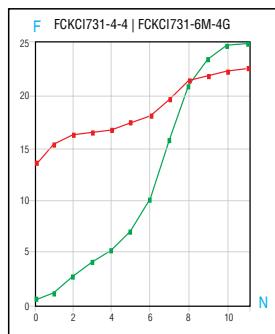

Flow Curves


87 psi ■ Return Direction ■ Controlled Direction N = Number of Turns F = Flow in SCFM

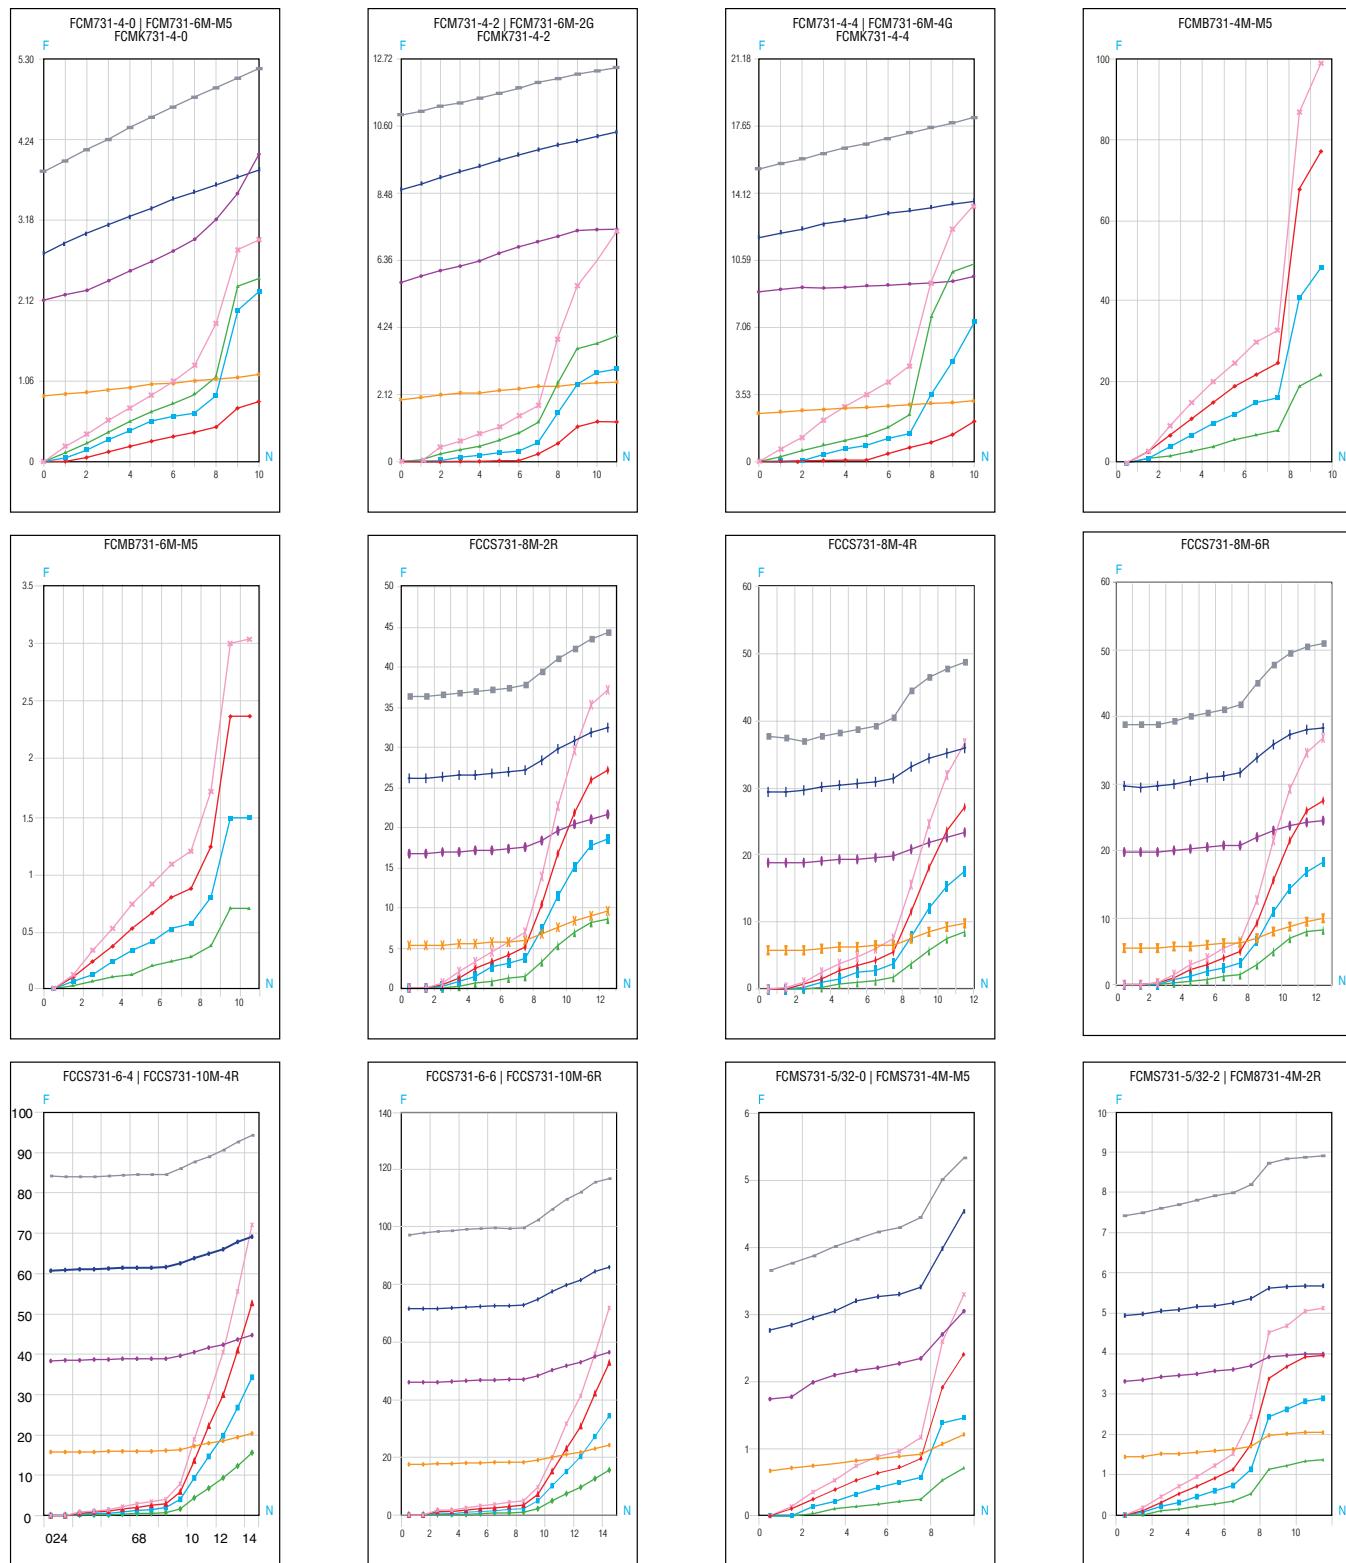

- | | |
|---------------------------------|----------------------------------|
| Controlled Direction – 14.5 psi | Controlled Direction – 43.5 psi |
| Controlled Direction – 72.5 psi | Controlled Direction – 101.5 psi |
| Return Direction – 14.5 psi | Return Direction – 43.5 psi |
| Return Direction – 72.5 psi | Return Direction – 101.5 psi |

Flow Curves

87 psi █ Return Direction █ Controlled Direction █ N = Number of Turns █ F = Flow in SCFM

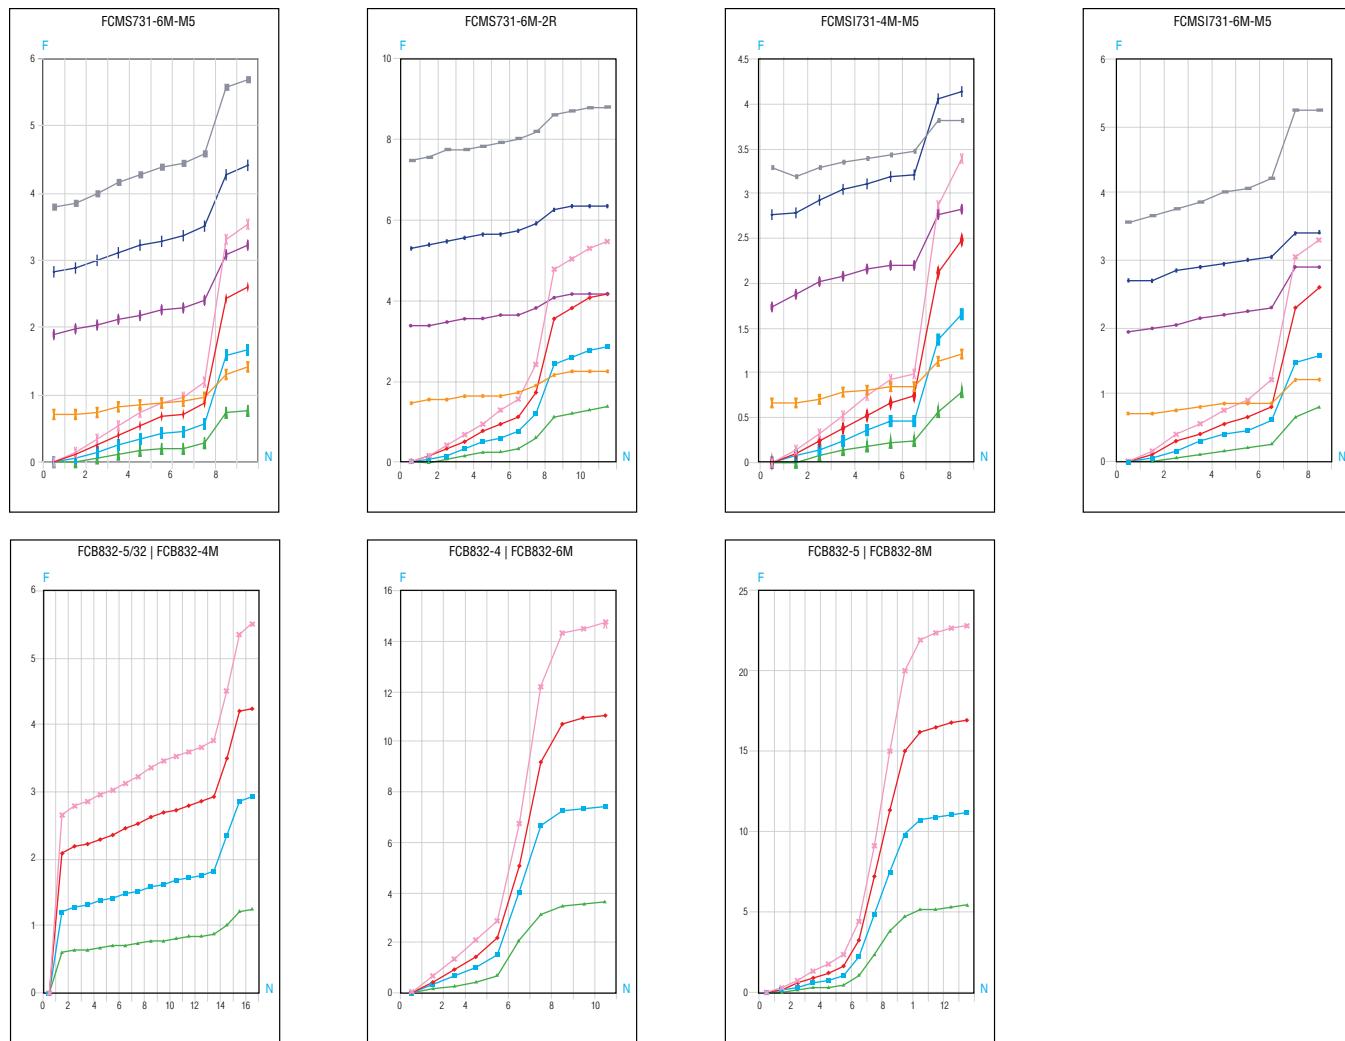


- | | |
|---------------------------------|----------------------------------|
| Controlled Direction – 14.5 psi | Controlled Direction – 43.5 psi |
| Controlled Direction – 72.5 psi | Controlled Direction – 101.5 psi |
| Return Direction – 14.5 psi | Return Direction – 43.5 psi |
| Return Direction – 72.5 psi | Return Direction – 101.5 psi |

N

Metric Fitting Nomenclature


Parker fitting part numbers are constructed from symbols that identify the size, shape or style, type and material of the fitting.

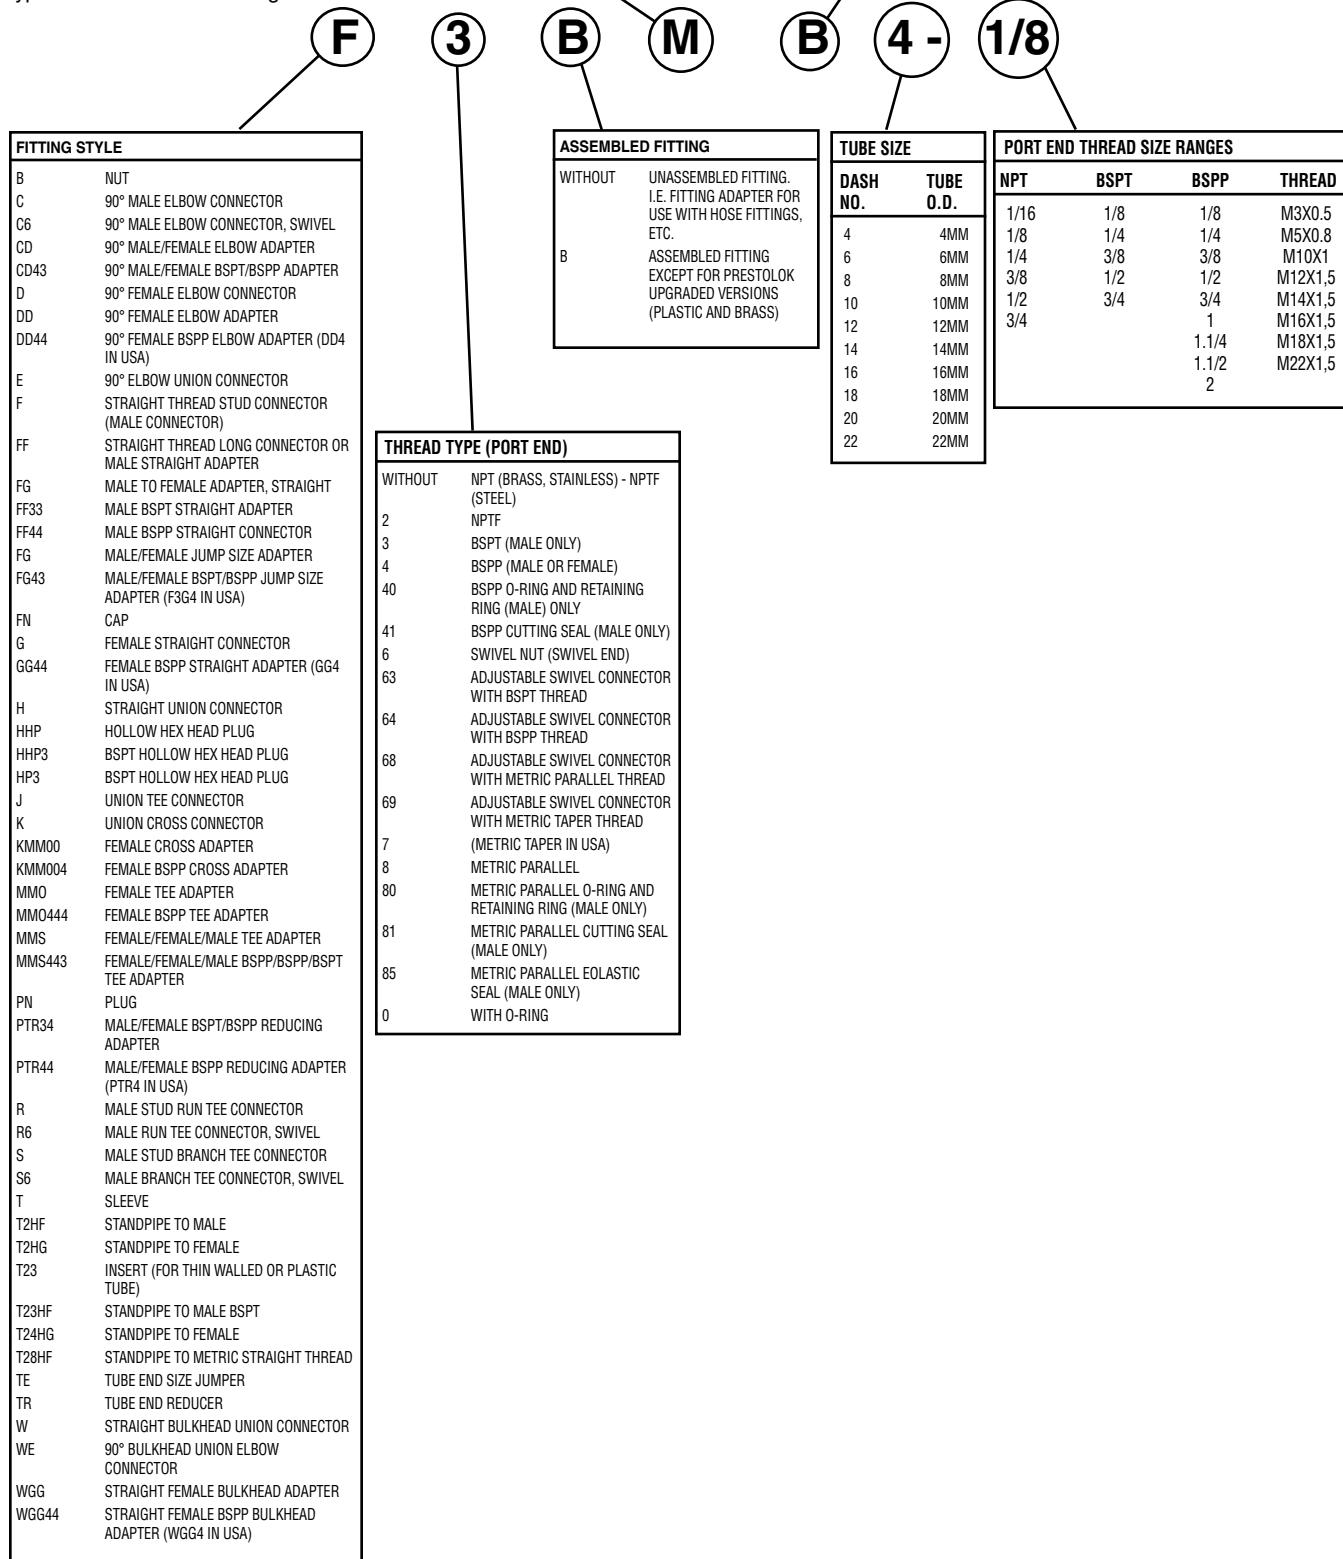

Flare and Thread Profiles


SAE (JIC) 37° Flare Nose Sizes

Actual Size

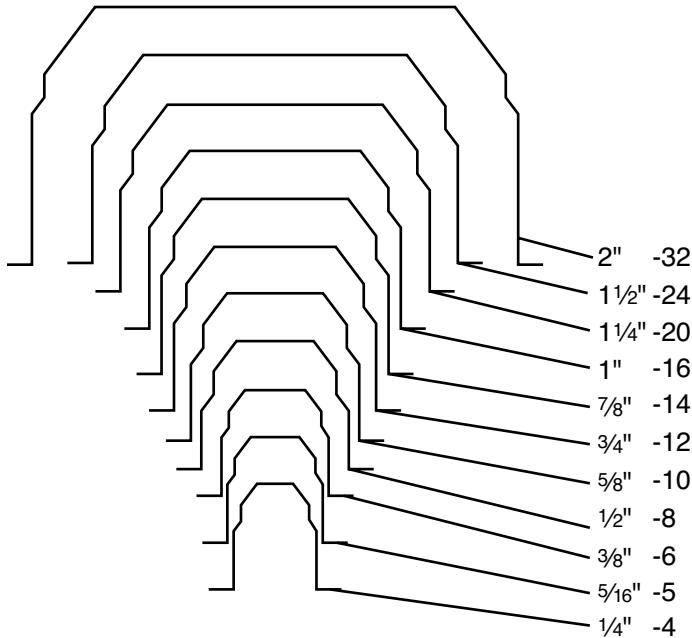


SAE 45° Flare Nose Sizes


Actual Size

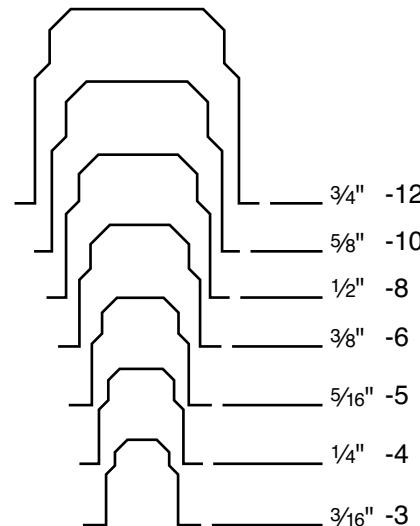

Male Pipe Thread Sizes

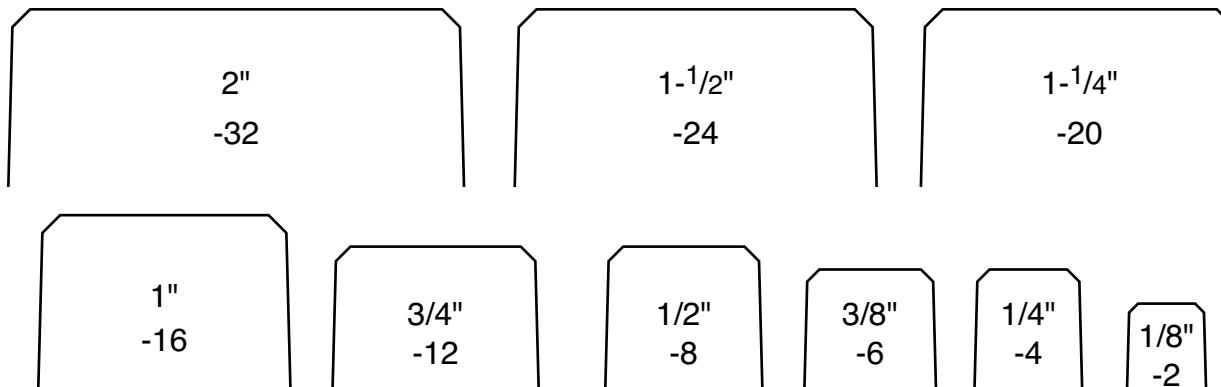

Actual Outside Diameters of Tubing

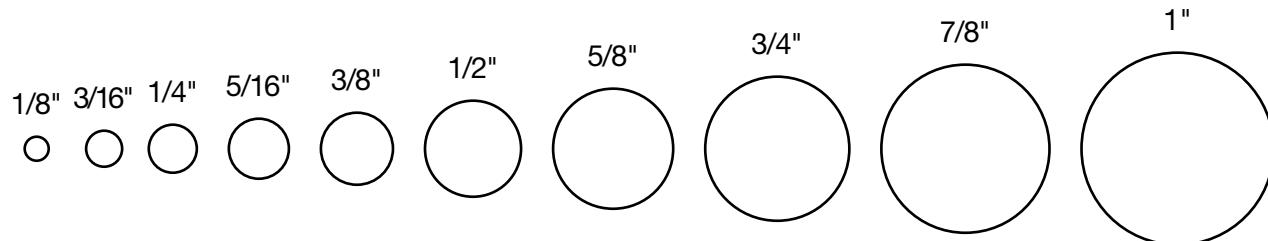

N

Pressure Conversions

KILOPASCALS (KPA)	MEGAPASCALS (MPA)	BAR (BAR)	KILOGRAMS PER SQUARE CENTIMETER (KGF/CM ²)	POUNDS PER SQUARE INCH(PSI)
100	1.0	1	1.02	14.50
200	.2	2	2.04	29.00
300	.3	3	3.06	43.50
400	.4	4	4.08	58.00
500	.5	5	5.10	72.50
600	.6	6	6.12	87.00
700	.7	7	7.14	101.50
800	.8	8	8.16	116.00
900	.9	9	9.18	130.50
1000	1.0	10	10.20	145.00
2000	2.0	20	20.40	290.10
3000	3.0	30	30.60	435.10
4000	4.0	40	40.80	580.20
5000	5.0	50	51.00	725.20
6000	6.0	60	61.20	870.20
7000	7.0	70	71.40	1015.30
8000	8.0	80	81.60	1160.30
9000	9.0	90	91.80	1305.30
10000	10.0	100	102.00	1450.00
20000	20.0	200	204.00	2901.00
30000	30.0	300	306.00	4351.00
40000	40.0	400	408.00	5802.00
50000	50.0	500	510.00	7252.00
60000	60.0	600	612.00	8702.00
70000	70.0	700	714.00	10153.00
80000	80.0	800	816.00	11603.00
90000	90.0	900	918.00	13053.00
100000	100.0	1000	1020.00	14504.00
200000	100.0	2000	2040.00	29008.00
300000	300.0	3000	3060.00	43511.00

POUNDS PER SQUARE INCH(PSI)	KILOPASCALS (KPA)	MEGAPASCALS (MPA)	BAR (BAR)	KILOGRAMS PER SQUARE CENTIMETER (KGF/CM ²)
10	68.90	.07	.70	.70
20	137.90	.14	1.41	1.41
30	206.80	.21	2.10	2.11
40	275.80	.28	2.80	2.81
50	344.70	.34	3.40	3.52
60	413.70	.41	4.10	4.22
70	482.60	.48	4.80	4.92
80	551.60	.55	5.50	5.63
90	620.50	.62	6.20	6.33
100	689.00	.70	6.90	7.00
200	1379.00	1.40	13.80	14.10
300	2068.00	2.10	20.70	21.10
400	2758.00	2.80	27.60	28.10
500	3447.00	3.40	34.50	35.20
600	4137.00	4.10	41.40	42.20
700	4826.00	4.80	48.30	49.20
800	5516.00	5.50	55.20	56.30
900	6205.00	6.20	62.10	63.30
1000	6895.00	6.90	68.90	70.30
2000	13790.00	13.80	137.90	140.70
3000	20684.00	20.70	206.80	211.00
4000	27579.00	27.60	275.80	281.30
5000	34474.00	34.50	344.70	351.60
6000	41369.00	41.40	413.70	421.90
7000	48263.00	48.30	482.60	492.30
8000	55158.00	55.20	551.60	562.60
9000	62053.00	62.10	620.50	632.90
10000	68948.00	68.90	689.00	703.00
20000	137895.00	137.90	1379.00	1406.00
30000	206843.00	206.80	2068.00	2110.00
40000	275790.00	275.80	2758.00	2813.00

English/Metric Conversions

Inches x 25.4 = Millimeters (mm)
 Inches x 2.54 = Centimeters (cm)
 Inches x .254 = Decimeters (dm)
 Feet x .3048 = Meters (m)
 Yards x .9144 = Meters (m)
 Psi x .0689 = Bars (Bar)
 Bars x 100 = Kilopascals (kPa)
 Psi x .0069 = Megapascals (MPa)
 Pound Inches x .113 = Newton Meters (N•m)
 Pound Feet x 1.356 = Newton Meters (N•m)

Millimeters x .0394 = Inches
 Centimeters x .3937 = Inches
 Meters x 3.281 = Feet
 Meters x 1.0936 = Yards
 Bars x 14.5 = Psi Megapascals x 145 = Psi
 Newton Meters x 8.85 = Pound Inches
 Newton Meters x .737 = Pound Feet

Millimeters to Fractions to Decimals

MM	INCHES	
	FRACTION	DECIMAL
.3969	1/64	.0156
.7938	1/32	.0312
1.1906	3/64	.0468
1.5875	1/16	.0625
1.9844	5/64	.0781
2.3812	3/32	.0937
2.7781	7/64	.1093
3.1750	1/8	.1250
3.5719	9/64	.1406
3.9688	5/32	.1562
4.3656	11/64	.1718
4.7625	3/16	.1875
5.1594	13/64	.2031
5.5562	7/32	.2187
5.9531	15/64	.2343
6.3500	1/4	.2500

MM	INCHES	
	FRACTION	DECIMAL
6.7469	17/64	.2656
7.1438	9/32	.2812
7.5406	19/64	.2968
7.9375	5/16	.3125
8.3344	21/64	.3281
8.7312	11/32	.3437
9.1281	23/64	.3593
9.5250	3/8	.3750
9.9219	25/64	.3906
10.3188	13/32	.4062
10.7156	27/64	.4218
11.1125	7/16	.4375
11.5094	29/64	.4531
11.9062	15/32	.4687
12.3031	31/64	.4843
12.7000	1/2	.5000

MM	INCH	
	FRACTION	DECIMAL
13.0969	33/64	.5156
13.4938	17/32	.5312
13.8906	35/61	.5468
14.2875	9/16	.5625
14.6844	37/64	.5781
15.0812	19/32	.5937
14.4781	39/64	.6093
15.8750	5/8	.6250
16.2719	41/64	.6406
16.6688	21/32	.6562
17.0656	43/64	.6718
17.4625	11/16	.6875
17.8594	45/64	.7031
18.2562	23/32	.7187
18.6531	47/64	.7343
19.0500	3/4	.7500

MM	INCH	
	FRACTION	DECIMAL
19.4469	49/64	.7656
19.8438	25/32	.7812
20.2406	51/64	.7968
20.2375	13/16	.8125
21.0344	53/64	.8281
21.4312	27/32	.8437
21.8281	55/64	.8593
22.2250	7/8	.8750
22.6219	57/64	.8906
23.0188	29/32	.9062
23.4156	59/64	.9218
23.8125	15/16	.9375
24.2094	61/64	.9531
24.6062	31/32	.9687
25.0031	63/64	.9843
25.4000	1	1.0000

Fluid Compatibility Guide

The following pages list general recommendations for the selection of valve materials. For specific cases, and for those not included in the Fluid Compatibility Chart, it is advisable to check with your Parker representative.

There are many specific environmental factors which might affect corrosion rate such as temperature, solution, concentration and presence of impurities. Therefore, we suggest that the information be used as a rough guide to material selection. If any questions exist regarding the expected performance of a material in a given application, actual tests should be performed to determine the suitability of the materials in question.

FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
ACETALDEHYDE	P	G	E	P	G	G	P	E	U	
ACETAMINE	G	G	G	E	G			E		
ACETATE SOLVENTS	E	E	E	P			U	E	U	
ACETIC ACID VAPORS	U	U	U	U				E		
ACETIC ACID (10%)	P	P	E	U	P	G	U	E	U	
ACETIC ACID (80%)	P	P	E	U	U	P	U	E	UU	UU
ACETIC ACID (AERATED)	P	P	E	G	G		P	E	UU	
ACETIC ACID (AIR FREE)	P	P	E	G	G		U	E	UU	
ACETIC ACID (CRUDE)	P	P	E	U	U		U	E	U	
ACETIC ACID (GLACIAL)	P	U	U	U	P	G	P	E		U
ACETIC ACID (PURE)	U	U	E	U	U	P	U	E	UU	
ACETIC ANHYDRIDE	U	U	G	U	U	P	U	E	UU	UE
ACETONE	E	E	E	U	U	E	U	E	E	E
ACETOPHENONE	G	G	G	U	U	E	U	E		
ACETYL CHLORIDE	E	G	P	U	U	U	U	E		
ACETYLENE	G	E	E	G	P	E	E	E		
ACID FUMES	U	U	G	P	G	U	P	E		
ACRYLONITRILE	E	E	E	E	P	U	U	E		
AIR	E	E	E	E	E	E	E	E		
ALCOHOL, AMYL	G	G	E	P	P	E	G	E		
ALCOHOL, BUTYL	G	G	E	G	G	P	E	E		
ALCOHOL, DIACETONE	E	E	E	U	P	G	U	E		
ALCOHOL, ETHYL	G	G	G	E	G	E	E	E		
ALCOHOL, ISOPROPYL	G	G	G	P	G	E	E	E		
ALCOHOL, METHYL	E	G	E	G	E	E	P	E		
ALCOHOL, PROPYL	E	G	E	G	G	E	E	E		
ALCOHOLS, FATTY	G	G	E	G	G	E	E	E		
ALUM	U	U	G	E	E		G	E		
ALUMINA	U	U	G	E	E	E	E	E		
ALUMINUM ACETATE	G		E	U	E	E	U	E		
ALUMINUM BROMIDE										
ALUMINUM CHLORIDE DRY	U	P	P	G	G	E	E	E		
ALUMINUM CHLORIDE SOLUTION	U	U	P	G	G	E	E	E		
ALUMINUM FLUORIDE	E	U	E	E	E	E	E	E		
ALUMINUM HYDROXIDE	U	U	U	P	G	E	E	E		
ALUMINUM NITRATE	U	U	U	P	G	G	U	E		
ALUMINUM OXALATE								E		
ALUMINUM SALTS								E		
ALUMINUM SULFATE	P	U	G	E	U	E	E	E		
AMINES	G	G	E	U	P	U	U	E		
AMYL CHLORIDE	G	P	G	U	G	E	E	E		
AMMONIUM BICARBONATE	G	P	G	G	G	E	E	E		
AMMONIA, ALUM			E	G	G			E		
AMMONIA, ANHYDROUS LIQUID	U	E	E	G	P	G	U	E		
AMMONIA, AQUEOUS	U	E	E	G	G	E	E	E		
AMMONIA, GAS, HOT	U	G	E	P	G	E	U	E		
AMMONIA LIQUOR								E		
AMMONIA SOLUTIONS	U	G	E	G	G	G	U	E		
AMMONIUM ACETATE	U	G	G	G	G	E	U	E		
AMMONIUM BROMIDE 5%								E		

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY

FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
AMMONIUM CARBONATE	G	G	G	P	E	E	G	E	E	
AMMONIUM CHLORIDE	U	U	P	G	E	E	E	E	E	
AMMONIUM HYDROXIDE 28%	U	P	G	G	E	G	E	E	E	U
AMMONIUM HYDROXIDE CONC.	U	P	G	P	E	E	E	E	E	
AMMONIUM MONOSULFATE										
AMMONIUM NITRATE	U	U	E	E	E	E	E	E	E	U
AMMONIUM OXALATE 5%										
AMMONIUM PERSULFATE	P	U	E	U	P	G	G	E	G	U
AMMONIUM PHOSPHATE	U	U	G	E	EE	E	EE	E	G	P
AMMONIUM PHOSPHATE DI-BASIC	P	U	G	E	EE	E	EE	E	G	
AMMONIUM PHOSPHATE TRI-BASIC	P	U	G	E	EE	E	EE	E	G	
AMMONIUM SULFATE	P	P	G	E	E	E	G	E	E	U
AMMONIUM SULFIDE	U	P	G	E	GE	E	GU	E		
AMMONIUM SULFITE	P	P	E	G	GU	GG	UE	E	E	
AMYL ACETATE	G	P	G	E	UE	GU	UU	E	EG	P
AMYL BORATE										
AMYL CHLORONAPHTHALENE										
AMYL NAPTHHALENE										
ANILINE	U	P	G	U	U	PP	P	E	E	P
ANILINE DYES	P	P	E	P	P	PG	GE	E	E	
ANIMAL OIL	G	G	G	E	P	GG	EE	E		
ANTIMONY TRICHLORIDE	U	U	G	P	U	GG	EE	E		
APPLE JUICE	P	U	G	E	EU	G	EE	E		
AQUA REGIA (STRONG ACID)	U	U	G	U	U	GU	UE	E		U
AROCLOR 1248	G	U	U	U	U	GG	EE			
AROCLOR 1254	G	U	U	U	U	GG	EE			
AROCLOR 1260	G	U	U	U	U	GG	EE			
AROMATIC SOLVENTS	E	P	E	U	U	U	EE	E		
ARSENIC ACID	U	P	G	E	EP	GU	EE	E		
ASPHALT EMULSION	E	G	E	U	P	GU	EE	E		U
ASPHALT LIQUID	E	G	E	P	P	UU	EE	E		
ASTM OIL, NO. 1	E	E	E	E	E	GU	EE			
ASTM OIL, NO. 2	E	E	E	E	E	GU	EE			
ASTM OIL, NO. 3	E	E	E	E	E	GU	EE			
ASTM OIL, NO. 4	E	E	E	E	G	GU	EE			
ASTM REFERENCE FUEL A	U	G	E	E	E	GU	EE			
ASTM REFERENCE FUEL B	U	G	E	E	E	GU	EE			
ASTM REFERENCE FUEL C	U	G	G	E	GU	EE	EE			
BAIRUM CARBONATE	G	G	G	G	EE	EG	EE	E	E	
BAIRUM CHLORIDE	G	P	G	E	G	EG	EE	E	E	
BAIRUM CYANIDE	P	P	G	G	E	GG	EE	E		
BAIRUM HYDRATE	U	P	E	E	E	GU	EE	E		
BAIRUM HYDROXIDE	P	P	G	E	E	GG	E	E	E	
BAIRUM NITRATE			E							
BAIRUM SALTS										
BAIRUM SULFATE	P	P	E	E	EE	GG	E	E		
BAIRUM SULFIDE	U	U	G	E	E	GG	EE	E	E	
BEER	G	U	G	E	G	GG	EE	E		U
BEET SUGAR LIQUORS	E	G	E	E	E	GU	EE	E		
BENZALDEHYDE	E	E	E	E	U	GU	EE	E		
BENZENE	G	G	G	G	U	GU	EE	E		
BENZENESULFONIC ACID, 10%	U	U	U	U	U	GU	EE			
BENZYL CHLORIDE	U	U	G	G	U	GU	EE			
BENZOIC ACID	G	U	U	G	P	GU	EE	E		P
BENZYL ALCOHOL			E	E	U	GU	EE			
BERRYLLIUM	G		G	G	G	GG	EE	E		
BLEACH LIQUOR										
BLEACHING POWDER WET	G		P	E	U	GU	EE	E		
BLOOD	G		E	E	G	GU	EE	E		
BORAX	U		P	E	G	GU	EE	E		E
BORAX LIQUORS	E	P	P	E	P	GU	EE	E		
BORDEAUX MIXTURE	P	U	G	E	U	GU	EE	E		
BORIC ACID	G	U	G	G	G	GU	EE	E		
Brake Fluid	G	U	G	U	U	GU	EE	E		
BRINES, SATURATED	G	U	U	U	U	GU	EE	E		
BROMINE, DRY	G	U	U	U	U	GU	EE	E		
BROMINE, WET	U	U	U	U	U	GU	EE	E		

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY

N



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
BUNKER OILS (FUEL)	G	G	E	G	G	P	E	E	E	
BUTADIENE	P	G	E	P	P	U	G	U	E	
BUTANE	E	G	E	G	G		E	E	E	
BUTTER	G	UU	E	G	E	GU	EU	E	E	
BUTTERMILK	U	U	E	U	U		EU	E	E	
BUTYL ACETATE	G		G	U	U		EU	E		E
BUTYL ALCOHOL	E	P	EE	GG	GG		GG	E		
BUTYL AMINE	G	G	E	UU	UU	E	UE	E		
BUTYL BUTYRATE	E	P	E	UU	UU		EE	E		
BUTYL CARBITOL	E	P	E	UU	UU		EG	E		
BUTYL CELLOSOLVE	E	P	E	GG	GG		EE	E		
BUTYL STEARATE										
BUTYLENE	E	E	E	UU	UU	U	UU	E	E	
BUTYRIC ACID	P	U	G	PP	PP	PE	PE	E		
CALCINE LIQUORS										
CALCIUM ACETATE										
CALCIUM BISULFITE	P	UU	GG	EE	EE	EE	EE	E	E	
CALCIUM CARBONATE	P	UU	GG	EE	GG	GG	EE	E	E	
CALCIUM CHLORATE	U	U	GG	GG	GG	GG	GG	E		
CALCIUM CHLORIDE	G	P	GG	EE	GG	GE	EE	E		
CALCIUM HYDROXIDE	P	P	GG	PP	PP	EE	EE	E		
CALCIUM HYPOCHLORITE	U	U	PP	GG	GG	GG	EE	E		
CALCIUM NITRATE										
CALCIUM PHOSPHATE	P		GG	GG	GG	GG	GG	E		
CALCIUM SALTS										
CALCIUM SILICATE	P		G	GG	GG	GG	GG	E		
CALCIUM SULFATE	P		GG	EE	EE	GG	EE	E		
CALCIUM SULFIDE	U	G	G	EE	GG	EE	EE		E	
CALICHE LIQUOR	P	G	E	GG	GG	G	GG	E		
CAMPHOR	P		G	GG	GG	GG	GG			
CANE SUGAR LIQUORS	G	P	EE	GG	GG	GG	GG	E		
CARBOLIC ACID	U	U	GG	GU	GU	GU	EE	E		
CARBON BISULFIDE	P	G	GG	GU	GU	GU	EE	E		
CARBON DIOXIDE, DRY	E	E	EE	PP	UU	GG	GG	E		
CARBON DISULFIDE	U	P	E	UU	UU	GG	EE	E		
CARBON MONOXIDE	E	E	EE	GG	UU	GG	GG	E		
CARBON TETRACHLORIDE, DRY	P	G	EE	UU	UU	GG	GG	E		
CARBON TETRACHLORIDE, WET	U	U	GG	UU	UU	GG	GG	E		
CARBONATED BEVERAGE	G	U	G	GU	GU	GG	GG	E		
CARBONATED WATER	G	G	E	EE	GG	EG	EE	E		
CASEIN	P								E	
CASTER OIL	E	G	E	E	GG	GG	EE	E		
CAUSTIC POTASH										
CAUSTIC SODA										
CELLULOSE ACETATE	G		G	PP	UU	GG	GG	E		
CELLULUBE	E	P	EE	UU	UU	GG	UU	E		
CHINA WOOD OIL	P	P	E	EE	UU	GG	EE	E		
CHLORACETIC ACID	P	U	UU	EE	UU	GG	PP	E		
CHLORINATED SOLVENTS	P	P	E	UU	UU	UU	PE	E		
CHLORINATED WATER	U	P	G	EE	UU	EE	E	E		
CHLORINE, WET	U	U	GU	GU	UU	UU	EE	E		
CHLORINE GAS	P	G	GG	UU	UU	UU	GG	E		
CHLORO BROMO METHANE	G	U	G	UU	UU	UU	EE	E		
CHLOROBENZENE, DRY	G	G	E	UU	UU	UU	EE	E		
CHLOROBUTADIENE										
CHLOROFORM, DRY	G	G	E	UU	UU	UG	GG	E		
CHLOROPHYLL, DRY	G	G	GG	GU	GU	GU	GG	E		
CHLOROSULFONIC ACID, DRY	P	U	GU	UU	UU	GU	GU	E		
CHLOROSULFONIC ACID, WET	U	U	GU	UU	UU	GU	GU	E		
CHLOROPHENOL										
CHROME ALUM	P	G	E	GU	GU	GG	GG	E		
CHROMIC ACID <50%	U	U	PP	UU	UU	PP	PP	E		
CHROMIC ACID >50%	U	U	P	G	UG	PG	PG	E		
CHROMIUM SULFATE	P									
CIDER										
CITRIC ACID	P	U	G	G	EE	G	EE	E		
CITRUS JUICES	G	U	G	E	E	G	EE	E		P

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
COCA-COLA SYRUP			E	G	G	E	G	E		
COCONUT OIL	G	P	G	E	P	E	E	E	E	
COFFEE	E		E	E	E		E	E		
COFFEE EXTRACTS, HOT	G	P	E	P	U	U	G	E		
COKE OVEN GAS	P	G	E	E	G	U	E	E		
COOKING OIL	G	G	E	E	G	U	E	E	E	
COPPER ACETATE	U	U	E	P	P	G	U	E		
COPPER CARBONATE			E							
COPPER CHLORIDE	U	U	P	G	G		E	E		
COPPER CYANIDE	U	U	E	E	E		G	E		
COPPER NITRATE	U	U	G	E	E		E	E	E	
COPPER SALTS									E	U
COPPER SULFATE	U	U	G	E	E	E	E	E	E	P
CORN OIL	G	P	G	E	P	P	E	E	E	
COTTONSEED OIL	G	P	G	E	G	P	E	E	E	
CREOSOTE OIL	G	G	G	P	U	U	E	E		
CREOSOLS	U	G	G	U	U	U	U	E		
CRESYLIC ACID	P	P	G	U	U	G	G	E		
CRUDE OIL, SOUR	P	G	E	E	G	U	E	E		
CRUDE OIL, SWEET	G	G	E	E	G		E	E		
CUPRIC NITRATE										
CUTTING OILS,	E	G	E	E	G		E	E	E	
WATER EMULSIONS										
CYANIDE PLATING SOLUTION	U		G	G	G	G	G	E		
CYCLOHEXANE	E	E	E	P	U	U	E	E		
CYCLOHEXANONE	G		E	U	U	U	E	E		
DECANE										
DENATURED ALCOHOL	G	U	G	G	G	G	E	E		
DETERGENTS, SYNTHETIC	G									
DEXTRIN	G		G	G	G	G	E	E		
DIACETONE ALCOHOL	E	E	E	U	P					
DICHLOROETHANE			P	U	U	U				
DICHLOROETHYL ETHER	G	E	G	E	P	U	U	E		
DIESEL OIL FUELS	E	E	G	U	P	U	E	E		
DIETHYL BENZENE										
DIETHYL SULFATE	G		G	P	P	P	G	E		
DIETHYLAMINE	G	E	E	G	P	P	G	E		
DIETHYLENE GLYCOL	G	E	E	E	E	E	G	E		
DIMETHYL FORMAMIDE	G		E	U	G	U	U	E		
DIMETHYL PHTHALATE										
DOCTYL PHTHALATE	E		E	E	P	U	P	E		
DXANE	G		G	U	U	U	P	U		
DIPENTANE	E		E	G	G	U	G	E		
DISODIUM PHOSPHATE			G	G	G					
DOW CHEMICAL HD50-4				G	G					
DOW CORNING 200, 510, 550				E	E					
DOWTHERM	E	G	E	U	P	U	E	E		
DRILLING MUD	G	G	E	E	E	E	E	E	E	
DRY CLEANING FLUIDS	P	G	E	U	G		G	E	E	
DRYING OIL	P	P	G	E	G			E	E	
ENAMEL	E		E	G	G			E		
EPSOM SALTS	G	P	P	G	E		E	E		
ETHANE	G	P	G	E	E		E	E		
ETHANOL	E	U	G	U	E	E	U	E		
ETHANOLAMINE	U	G	E	E	P		U	E		
ETHERS	G	E	G	E	U	P	P	E	P	
ETHYL ACETATE	P	G	G	E	U	U	U	E		
ETHYL ACRYLATE	G	P	E	U	E	E	U	E		
ETHYL ALCOHOL	G	G	G	G	E	E	E	E		
ETHYL BENZENE									E	
ETHYL BROMIDE	E		G	G	G	G	G	E		
ETHYL CHLORIDE, DRY	G	G	E	P	P	P	G	G		
ETHYL CHLORIDE, WET	P	U	G	P	P	G	G	E		
ETHYL ETHER	G		E	U	E	U	E	E		
ETHYL HEXANOL										
ETHYL SILICATE										
ETHYL SULFATE	G		G	G	G	G	E	E	E	

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY

N

FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
ETHYLENE CHLORIDE	U	U	G	U	E	U	U	E		
ETHYLENE DICHLORIDE	G	G	G	E	U	E	U	E		
ETHYLENE GLYCOL	P	G	G	U	G	U	E	E		
ETHYLENE OXIDE	P	U	U	E	G	U	E	E		
FATTY ACIDS	P	U	U	U	U	U	E	E	E	
FERRIC CHLORIDE	U	U	U	E	U	U	E	E		U
FERRIC HYDROXIDE	U	U	E	G	E	E	E	E		
FERRIC NITRATE	U	U	P	E	E	E	E	E	E	
FERRIC SULFATE	U	U	G	E	E	E	E	E	E	U
FERROUS AMMONIUM CITRATE	G	U	G	E	E	E	E	E	E	U
FERROUS CHLORIDE	G	U	G	E	E	E	E	E	E	U
FERROUS SULFATE	G	U	G	E	E	E	E	E	E	U
FERROUS SULFATE, SATURATED	P	P	E	P	P	G	G	E		
FERTILIZER SOLUTIONS	P	G	G	E	G	U	E	E	G	
FISH OILS	G	G	E	E	G	U	E	E	G	
FLUE GASES	G	E	E	E	P	U	P	E	P	
FLUOBORIC ACID										
FLUORINE, DRY	U	U	G	U	G				E	
FLUOROSILICIC ACID	G	U	G	P	P	P	P	E		U
FOOD FLUIDS & PASTES	G	P	E	G	P	G	U	E		
FORMALDEHYDE, COLD	E	E	E	G	P	G	U	E		
FORMALDEHYDE, HOT	G	U	P	G	G	G	E	E	E	U
FORMIC ACID, COLD	G	U	G	U	G	E	E	E	U	
FORMIC ACID, HOT	G	U	G	U	G	E	E	E	U	E
FRUIT JUICES	G	G	E	E	E	E	E	E	E	
FUEL OIL	G	G	E	E	P	U	E	E	E	
FUMARIC ACID										
FURFURAL	E	E	E	G	P	P	U	E	E	
GALIC ACID 5%	P	U	G	G	G	P	E	E	E	
GAS, NATURAL	G	G	E	E	E	U	E	E	E	
GAS, ODORIZERS	E	G	G	G	G		E	E	E	
GAS MFG.	G	G	G	E			E	E	E	
GASOLINE, AVIATION	E	E	E	E	P		E	E	E	
GASOLINE, LEADED	E	E	E	E	P	U	E	E	E	
GASOLINE, MOTOR	E	E	E	E	P	U	E	E	E	
GASOLINE, REFINED	G	G	E	E	P	U	E	E	E	
GASOLINE, SOUR	G	G	E	P	U	U	E	E	E	
GASOLINE, UNLEADED	E	E	E	P	U	E	E	E	E	E
GELATIN	E	E	U	E	E		E	E	E	
GLUCOSE	E	G	E	E	E		E	E	E	
GLUG	E	G	E	E	E		E	E	E	
GLYCERINE	G	P	E	P	G	E	E	E	P	E
GLYCOL	G	P	G	G	E	E	E	E	P	
GLYCOL AMINE	U	G	G	E						
GRAPHITE	G	E	E	E						
GREASE	P	E	E	E						
GULF-FR FLUID, EMULSION										
GULF-FR FLUID G										
GULF-FR FLUID P										
HELIM GAS	G	E	E	G	G	G	G	E		
HEPTANE	E	G	E	E	G	G	E	E	E	
HEXANE	G	E	E	E	P	U	E	E	E	
HEXANOL, TERTIARY	E	P	E	E	P	U	G	E	E	
HEXYL ALCOHOL	E	P	E	E	P	U	E	E	E	
HYDRAULIC OIL, PETROLEUM BASE	G	E	E	E	G	U	E	E	E	
HYDRAZINE	U	U	G	E	P	G	U	E		
HYDRIGEN SULFIDE, DRY	P	G	E	P	P	E	E	E		
HYDROCHLORIC ACID, AIR FREE	U	U	U	G	G	G	E	E		
HYDROCYANIC ACID	U	U	U	U	G	G	E	E		
HYDROFLUORIC ACID	U	U	U	U	G	G	E	E		
HYDROFLUOSILICIC ACID	E	U	P	E	G	G	E	E		
HYDROGEN GAS, COLD	G	G	E	G	G	G	E	E		
HYDROGEN GAS, HOT	G	G	G	G	G	G	E	E		
HYDROGEN PEROXIDE, CONCENTRATED	U	U	G	U	U	G	G	E		
HYDROGEN PEROXIDE, DILUTE	P	U	G	P	G	G	E	E	G	
HYDROGEN SULFIDE, WET	U	P	G	P	G	G	E	E	E	U

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
HYDROLUBE	P	U	G	E	G	E	E	E	E	
HYPOTHIOSULFATE	U	U	P	P	E	E	E	E	E	
HYPOCHLORITES, SODIUM	E	E	E	P	E	U	E	E	E	
ILLUMINATING GAS	P	U	E	E	G	G	E	E	E	
INK, NEWSPRINT	P	U	U	U	G	U	E	E	E	
IODINE, WET	U	U	U	G	U	U	E	E	E	
IDOFORM	P	G	E	E	U	U	E	E	E	
ISOPROPYL ACETATE	G	G	G	U	G	U	E	E	E	
ISOPROPYL ALCOHOL	E	E	E	P	P	U	E	E	E	
ISOPROPYL ETHER	ISO-BUTANE	G	G	P	P	U	E	E	E	
ISO-OCTANE	E	E	E	E	P	U	E	E	E	
J P-4 FUEL	E	E	E	E	P	U	E	E	E	
J P-5 FUEL	E	E	E	E	P	E	E	E	E	
J P-6 FUEL	E	E	E	E	P	E	E	E	E	
KEROSENE	E	G	E	E	P	E	E	E	E	
KETCHUP	U	U	E	E	U	U	E	E	E	
KETONES	E	E	E	E	U	U	E	E	E	
LACTIC ACID, CONC. COLD	U	U	E	G	E	G	E	E	U	
LACTIC ACID, CONC. HOT	U	U	G	P	P	GG	G	E	U	
LACTIC ACID, DILUTE COLD	U	U	E	G	E	GG	E	E	U	
LACTIC ACID, DILUTE HOT	U	U	E	P	U	G	E	E	U	
LACTOSE	G	G	G	G	P	G	G	E	U	
LAQUER	E	P	E	U	P	U	G	E	E	
LARD	G	P	E	G	P	P	E	E		
LARD OIL	G	P	G	E	G	GG	E	E		
LEAD ACETATE	P	U	G	E	G	GG	G	E		
LEAD SULFATE	P	G	G	G	G	GG	G	E		
LECITHIN	P	G	G	U	G	U	G	E		
LINOLEIC ACID	G	G	E	G	G	U	G	E		
LINSEED OIL	G	E	E	E	P	U	E	E		
LITHIUM CHLORIDE	G	G	G	G	G	G	E	E		
LPG	E	G	E	E	G	U	E	E		
LUBRICATING OIL	G	E	G	E	G	GG	E	E		
LUDOX	G	G	G	G	G	GG	G	E		
MAGNESIUM BISULFATE	G	G	E	E	G	G	G	E		
MAGNESIUM BISULFIDE	U	G	G	G	G	GG	G	E		
MAGNESIUM CARBONATE	G	G	E	E	G	GG	E	E		
MAGNESIUM CHLORIDE	G	P	G	E	E	EE	E	E		
MAGNESIUM HYDROXIDE	G	G	E	E	G	EE	E	E		
MAGNESIUM HYDROXIDE HOT	U	G	E	E	G	EE	E	E		
MAGNESIUM NITRATE	G	G	E	E	G	EE	G	E		
MAGNESIUM SALTS	G	G	E	E	E	EE	E	E		
MAGNESIUM SULFATE	G	G	G	E	E	EE	E	E		
MALEIC ACID	G	U	G	E	E	UU	E	E		
MALEIC ANHYDRIDE	G	G	G	E	E	U	G	E		
MALIC ACID	G	U	E	E	E	G	E	E		
MALT BEVERAGES										
MANGANESE CARBONATE	G		G	E	G	G	E	E		
MANGANESE SULFATE	U		U	E	G	E	E	E		
MAYONNAISE	U		E	E	G	GG	E	E		
MEAT JUICES	U		P	G	G	GG	E	E		
MELAMINE RESINS	U		G	E	G	GG	E	E		
MERCURIC CHLORIDE	U		E	E	G	GG	E	E		
MERCURIC CYANIDE	U		E	E	G	GG	E	E		
MERCUROUS NITRATE	U		E	E	E	E	G	E		
MERCURY	U		E	E	E	E	E	E		
METHANE	E		G	E	E	E	E	E		
METHANOL	E		E	E	E	E	E	E		
METHANOL	G		E	E	G	E	U	E		
METHYL ACETATE	E		G	E	U	U	G	E		
METHYL ACETONE	E		E	E	U	U	U	E		
METHYL ALCOHOL	G		G	E	G	U	P	E		
METHYL BROMIDE 100%	P		G	G	U	U	GU	E		
METHYL CELLOSOLVE	E		G	E	U	U	U	E		
METHYL CELLULOSE	G		E	E	U	U	G	E		
METHYL CHLORIDE	G		E	E	U	U	G	E		

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY

N



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
METHYL ETHER				E	U	U	E			
METHYL ETHYL KETONE	E	E	P	G	U	G	U	E	E	E
METHYL FORMATE	E	P	E	U	G	G	U	E	E	
METHYL ISOBUTYLE KETONE				U	U					
METHYLAMINE	U	G	E	U	U	G	U	E		
METHYLENE CHLORIDE	E	G	E	U	U	U	P	E		U
MILK & MILK PRODUCTS	G	U	E	E	E	E	E	E	E	
MIL-F-81912, JP-9	E	E	E	U	U	U	E			
MIL-H-5606	E	E	E	E	G	U	E			
MIL-H-6083	E	E	E	E	E	U	E			
MIL-H-7083	E	E	E	E	G	U	G			
MIL-H-8446	G	E	E	E	G	U	E			
MIL-L-2104 &2104B	E	E	E	E	G	U	E			
MIL-L-7808	U	G	E	G	U	U	E	E		
MINE WATERS, ACID	P	U	P	E	E	U	E			
MINERAL OILS	G	G	E	E	G	U	E	E		
MINERAL SPIRITS	G	G	G	E	E	U	E	E	E	
MIXED ACIDS, COLD	U	P	G	G	U	U	G	E	E	
MLO-7277 & MLO-7557	G	E	E	U	U	U	E	E		
MOBILE HF	E	E	E	E	G	U	E	E	E	
MOLASSES, CRUDE	E	E	P	E	E	U	E	E	E	
MOLASSES, EDIBLE	E	P	E	E	E	U	E	E	E	
MOLYBDIC ACID										
MONOCHLORO BENZENE DRY				G	U		E			
MONOMETHYL HYDRAZINE										
MORPHOLINE	G	U	E	G	U	G	U	E		
MURIATIC ACID	U	G	E	G	E	U	E	E		
MUSTARD	E	E	G	G	P	U	E	E	E	
NAPHTHENIC ACID	G	E	G	G	U	U	E	E		
NAPHTHA	G	G	G	G	P	U	E	E	E	
NAPTHALENE	G	G	G	U	U	U	E	E	E	
NATURAL GAS, SOUR	G	G	E	E	U	U	E	E		
NEATSFOOT OIL										
NICKEL ACETATE	U	G	E	G	G	E	U	E		
NICKEL AMMONIUM SULFATE	U	U	U	E	E	G	U	E		
NICKEL CHLORIDE	U	U	U	G	E	G	E	E	E	
NICKEL NITRATE	U	U	U	G	E	E	E	E	E	
NICKEL SALTS										
NICKEL SULFATE	U	U	U	G	E	U	E	E	E	
NITRIC ACID 100%	U	U	U	U	U	U	U			
NITRIC ACID 10%	U	U	U	U	U	U	E	E		
NITRIC ACID 30%	U	U	U	E	P	P	E	E		
NITRIC ACID 80%	U	U	P	U	U	U	G	E		
NITRIC ACID ANHYDROUS	U	U	G	E	U	P	E	E		
NITROBENZENE	U	U	E	E	E	G	E	E		
NITROGEN	E	E	E	E	E	G	E	E	E	
NITROUS ACID 10%	U	U	G	E	P	E	E	E		
NITROUS GASES	U	U	G	E	E	G	E	E		
NITROUS OXIDE	G	G	G	G	G	U	E	E		
NOCOTINIC ACID	E	G	E	G	G	U	G	E		
OCTYL ALCOHOL	E	E	E	E	G	U	G	E		
OILS, ANIMAL	E	E	E	E	G	U	G	E		
OILS, PETROLEUM REFINED	G	E	E	E	G	U	E	E	E	
OILS, PETROLEUM SOUR	P	G	E	G	G	U	E	E	E	
OILS, WATER MIXTURE	E	G	E	E	G	U	E	E	E	
OILS & FATS										
OLAIC ACID										
OLEIC ACID	G	G	E	G	G	U	G	E		
OLEUM	P	G	G	G	P	U	E	E	E	
OLEUM SPIRITS	U	G	G	P	U	U	E	E	E	
OLIVE OIL	P	G	E	E	G	U	G	E	E	
ORTHO-DICHLOROBENZENE	G	G	G	E	U	U	E	E		
OTHER KETONES	E	E	E	U	U	U	U	E		
OXALIC ACID	G	U	G	G	P	G	E	E		
OXYGEN	E	G	E	E	G	E	G	E		
OZONE, DRY	E	E	P	E	U	U	E	E		
OZONE, WET	G	G	E	E	U	U	G	E		

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
PAINTS & SOLVENTS	E	E	E	U	U	U	G	E		
PALM OIL	G	P	G	G	G	U	E	E	E	
PALMITIC ACID	G	P	G	G	G	G	E	E	E	
PAPER PULP	G	E	E	E	P	U	G	E	E	
PARAFFIN	E	G	E	G	G	U	E	E	E	
PARAFORMALDEHYDE	G	G	G	G	G	U	E	E	E	
PARALDEHYDE			G	G	G	U		E		
PARA-DICHLOROBENZENE	G	E	E	U	E	U	E			
PARKER O LUBE	E	E	E	E	E	U	E			
PEANUT OIL	G	E	E	E	U	U	E			
PENTANE	E	G	E	U	U	U	E	E	E	
PERCHLORETHYLENE, DRY	P	G	E	U	G	U	E	E		
PERCHLORIC ACID-2N	U	G	P	G	U	G	E			
PETROLATUM (PETROLEUM JELLY)	G	P	U	E	U	G	E	E	E	
PHENOL	G	U	E	E	U	U	G	E	U	E
PHOSPHATE ESTER	U	U	E	E	U	G	E	E		
PHOSPHORIC ACID 10%	U	U	U	G	G	G	E	E	U	
PHOSPHORIC ACID 50% COLD	U	U	U	G	G	G	E	E	U	U
PHOSPHORIC ACID 50% HOT	U	U	U	G	G	G	E	E	U	U
PHOSPHORIC ACID 85% COLD	G	G	E	P	P	G	E	E	U	
PHOSPHORIC ACID 85% HOT	P	P	G	P	P	G	E	E	U	
PHOSPHORIC ANHYDRIDE	U	G	E	U	U	G	G	E		
PHOSPHOROUS TRICHLORIDE	G	P	G	P	P	G	G	E		
PTHALIC ACID	G	P	G	P	P	E	E	E		
PTHALIC ANHYDRIDE	G	P	U	G	P	U	E	E		
PICRIC ACID	P	U	G	P	P	E	E	E		
PINE OIL	G	G	E	E	E	U	E	E		
PINEAPPLE JUICE	P	P	E	E	E	U	E	E		
PITCH			E	P	P	U	E	E		
PLATING SOLUTIONS, CHROME	E	U	E	E	U	E	E			
PLATING SOLUTIONS, OTHER	E	E	E	E	U	E	E			
PNEUMATIC SERVICE								E		
POLYSULFIDE LIQUOR	U	G	G	G	E	G	E			
POLYVINYL ACETATE	G	G	G	G	P	G	E			
POLYVINYL CHLORIDE	G	G	E	G	P	G	E			
POTASSIUM ACETATE	G	E	G	G	G	E	U			
POTASSIUM BICARBONATE				E	G					E
POTASSIUM BICHROMATE				E	G				G	
POTASSIUM BISULFATE				E	G				E	
POTASSIUM BISULFITE				E	E				E	
POTASSIUM BROMIDE				E	E				E	
POTASSIUM CARBONATE	P	P	U	G	E	E			E	
POTASSIUM CHLORATE	G	G	G	G	E	E			E	
POTASSIUM CHLORIDE	P	P	G	G	E	E			E	
POTASSIUM CHROMATE	G	G	G	G	E	E			E	
POTASSIUM CYANIDE	U	G	G	G	E	E			E	
POTASSIUM DICHROMATE	U	G	P	G	E	E			E	
POTASSIUM DIPHOSPHATE	G	E	E	E	E	G	E		E	
POTASSIUM FERRICYANIDE	U	G	P	E	E	E			E	
POTASSIUM FERROCYANIDE	G	P	P	G	E	E			E	
POTASSIUM HYDROXIDE COLD	U	E	G	G	E	G				
POTASSIUM HYDROXIDE DILUTE HOT	U	G	G	G	G	E				
POTASSIUM HYDROXIDE TO 70% COLD										
POTASSIUM HYDROXIDE TO 70% HOT	U	E	G	P	G	E				
POTASSIUM HYDROXIDE TO 70% HOT	U	E	G	P	G	E				
POTASSIUM IODIDE	U	G	P	G	E	E			E	
POTASSIUM NITRATE	G	G	G	G	E	E			E	
POTASSIUM OXALATE										
POTASSIUM PERMANGANATE	G	G	G	E	E	G			E	
POTASSIUM PHOSPHATE	P	G	G	E	E	E			E	
POTASSIUM PHOSPHATE DI-BASIC	G	E	E	G	E	G			E	
POTASSIUM PHOSPHATE TRI-BASIC										
POTASSIUM SALTS										
POTASSIUM SULFATE	G	G	E	E	E	E			E	
POTASSIUM SULFIDE	G	G	G	E	G	G				
POTASSIUM SULFITE	G	G	G	E	G	G				
PRODUCER GAS	G	G	G	G	E	U			E	

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY

N



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
PROPANE GAS	E	G	G	E	G	U	E	E	E	
PROPYL ACETATE	U	E	E	U	U	G	U	E		
PROPYL ALCOHOL	E	G	G	E	E	G	E	E		
PROPYL BROMIDE	G	E	G	G	G	G	G	E		
PROPYLENE	E	G	E	U	U	G	E	E	P	
PROPYLENE GLYCOL	G	G	G	E	E	G	E	E		
PYDRAUL	E	P	E	U	U	E	G	E		
PYRIDINE			G	U	U		U	E		
PYROGARD 42, 43, 53, 55				U	U	E	E	E		
PYROGARD D					G	E	E	E		
PYROLGALIC ACID	G	G	G	E	E	E	E	E	E	
QUENCH OIL	G	G	G	E	E	E	E	E	E	
QUININE, SULFATE, DRY				E				E		
R P-1 FUEL	E	E	E	G	P	P	E	E	E	
RESINS & ROSINS	E	P	E	P	P		E	E		
RESORCINOL			G				E	E		
ROAD TAR	E	E	E	G	P	U	E	E	E	
ROOF PITCH	E	E	E	G	P		E	E	E	
ROSIN EMULSION	G	P	E	U	P		G	E		
RUBBER LATEX EMULSIONS	E	G	E	U	P		E	E		
RUBBER SOLVENTS	E	E	E	U	E		E	E	P	
SALAD OIL	G	P	G	E	E	G	E	E	E	
SALICYLIC ACID	P	U	E	E	E	G	E	E	E	
SALT	G	P	G	E	E	E	E	E	E	
SALT BRINE	G		G	E	U	G	G	E		
SAUERKRAUT ARINE				G			E	E		
SEA WATER	P	P	G	E	P	G	E	E		
SEWAGE			G	E	E	U	E	E		
SHELL IRUS 905	E	E	E	E	G	U	E			
SHELLAC	E	E	E	E	E	G	E	E		
SILICONE FLUIDS	G		G	G	G		G	E		
SILVER BROMIDE										
SILVER CYANIDE	U		E	G	P	E	G	E		
SILVER NITRATE	U		E	E	G	G	E	E		
SILVER PLATING SOL.									E	
SKYDROL 500	E	G	E	U	U	E	U	E		
SKYDROL 7000, TYPE 2	U	E	E	U	U	G	G	E		
SOAP SOLUTIONS	E	E	E	E	G	E	E	E		
SODIUM ACETATE	G	P	G	E	G	G	E	E		
SODIUM ALUMINATE	G	P	E	E	E	G	E	E		
SODIUM BENZOATE									E	
SODIUM BICARBONATE	G	P	G	E	E	E	E	E	E	
SODIUM BICHROMATE			G	U	E					
SODIUM BISULFITE 10%	G	U	E	E	E	E	G	E	E	P
SODIUM BISULFITE 10%	G	U	E	E	E	E	G	E	E	P
SODIUM BORATE	G	P	G	E	E	E	G	E	E	
SODIUM BROMIDE 10%	G	P	G	E	E	E	G	E	E	
SODIUM CARBONATE	G	G	E	E	E	E	E	E	E	E
SODIUM CHLORATE	G	P	G	E	E	G	E	E	E	P
SODIUM CHLORIDE	G	P	G	E	E	G	E	E	E	P
SODIUM CHROMATE	P	G	E	G	E	E	E	E	E	
SODIUM CITRATE										
SODIUM CYANIDE	U	G	E	E	E	G	E	E	E	E
SODIUM FERRICYANIDE										
SODIUM FLUORIDE	P	U	G	E	E	G	E	E	E	E
SODIUM HYDROXIDE 20% COLD	E	E	G	E	G	G	G	E		E
SODIUM HYDROXIDE 20% HOT	E	E	G	E	G	G	P	E		E
SODIUM HYDROXIDE 50% COLD	E	E	G	E	G	G	P	E		E
SODIUM HYDROXIDE 50% HOT	E	E	G	E	G	G	P	E		E
SODIUM HYDROXIDE 70% COLD	E	E	G	E	G	P	P	E		
SODIUM HYDROXIDE 70% HOT	G	U	E	U	U	G	P	E		
SODIUM HYPOCHLORITE (BLEACH)							E	E		
SODIUM HYPOSULFITE							E	E		
SODIUM LACTATE							E	E		
SODIUM METAPHOSPHATE	P	G	G	E	E	G	G	E		
SODIUM METASILICATE COLD	G	P	G	E	E					
SODIUM METASILICATE HOT	G	G	U	E						U

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY



FLUID	BRASS	CARBON STEEL	316 S.S.	BUNA N (NITRILE)	NEOPRENE	EPR	FLUOROCARBON	PTFE	ACETAL	NYLON
SODIUM NITRATE	G	G	E	P	G	G	E	E	E	E
SODIUM NITRITE	G	G	G	P	U	E	G	E	G	
SODIUM PERBORATE	G	G	G	P	G	E	E	E	E	
SODIUM PEROXIDE	U	P	G	G	G	E	E	E	E	
SODIUM PHOSPHATE	P	P	G	E	E	E	E	E	E	
SODIUM PHOSPHATE DI-BASIC	P	P	G	E	E	E	E	E	E	
SODIUM PHOSPHATE TRI-BASIC	P	P	G	G	G	E	E	E	E	
SODIUM POLYPHOSPHATE			G	G	E	E	E	E		
SODIUM SALICYLATE			E				E	E		
SODIUM SALTS							E	E	E	
SODIUM SILICATE	G	G	G	E	E	GG	E	E	E	E
SODIUM SILICATE, HOT	P	P	G	E	E	GG	E	E	E	E
SODIUM SULFATE	G	G	EE	E	EE	EG	E	E		E
SODIUM SULFIDE	U	G	G	E	EE	GG	E	E	E	
SODIUM SULFITE	P	G	E	E	EE	GG	E	E	E	
SODIUM TETRABORATE	P	G	G	E	EE	GG	E	E	E	
SODIUM THIOSULFATE	G	P	E	E	EE	GG	E	E	E	
SOYBEAN	G	P	U	U	GG	GG	E	E	E	
STANNIC CHLORIDE	P	U	U	E	EE	GG	E	E		
STARCH	G	P	G	E	EE	GG	E	E	E	
STEAM (212 F)	E	E	E	U	U	PP	E	E	E	
STEARIC ACID	P	P	G	E	U	GG	E	E	E	
STODDARD SOLVENT	G	E	E	E	GU	UU	E	E		
STYRENE	E	E	E	U	GU	UE	E			
SUCROSE SOLUTIONS	E	E	E	E	GG	E	E			
SUGAR, SYRUPS & JAM	G	E	E	E	GG	E	E			
SUGAR LIQUIDS	E	G	E	E	EE	GG	E	E	E	
SULFATE, BLACK LIQUOR	P	P	G	P	GG	E	E	E	E	
SULFATE, GREEN LIQUOR	P	P	G	P	GG	E	E	E	E	
SULFATE, WHITE LIQUOR	P	P	G	P	GG	E	E	E	E	
SULFUR	U	P	G	U	PP	GG	E	E	E	
SULFUR, MOLTEN	U	P	G	U	PU	GG	E	E	E	
SULFUR CHLORIDES	G	U	U	U	UU	EE	E	E	E	
SULFUR DIOXIDE, DRY	G	U	U	U	UU	EG	E	E	E	
SULFUR DIOXIDE, WET	U	G	E	E	U	EG	E	E	E	
SULFUR HEXAFLUORIDE	G	E	E	E	GU	GG	E	E		
SULFUR TRIOXIDE	G	G	G	U	UU	GG	E	E		
SULFUR TRIOXIDE, DRY	G	G	G	U	UG	GG	E	E		
SULFURIC ACID 0 TO 77%	P	P	P	E	GU	GU	P	P		
SULFURIC ACID 100%	P	P	P	U	GU	GU	E	E		
SULFUROUS ACID	U	U	U	E	GU	GU	E	E		
SUNSAFE	U	U	E	E	GU	GU	E	E		
TALL OIL	G	G	G	G	GG	GG	E	E	E	
TANNIC ACID	G	P	G	G	GG	GG	E	E	E	
TANNING LIQUORS			G	G	GG	GG	E	E		
TAR & TAR OILS	E	E	E	P	GU	GU	E	E	E	
TARTARIC ACID	G	U	E	E	GU	GU	E	E	E	
TERPINEOL				G	GU	GU	E	E		
TERTIARY BUTYL ALCOHOL	E	E	E	G	GU	GU	E			
TETRACHLOROETHANE	G	G	E	U	GU	GU	E			
TETRACHLOROETHYLENE	G	P	G	U	GU	GU	E			
TETRAETHYL LEAD	G	E	G	G	U	U	E	E	E	
TITANIUM TETRACHLORIDE	G	E	E	G	U	U	E	E		
TOLUOL (TOLUENE)	E	E	E	E	U	U	E	E	E	E
TOMATO JUICE	P	P	E	E	E	GG	E	E	E	
TRANSFORMER OIL	G	P	E	EE	E	GG	E	E	E	
TRANSMISSION FLUID, TYPE A	E	E	E	EE	E	GG	E	E	E	
TRIBUTYL PHOSPHATE	E	E	G	E	U	GU	E	E	E	
TRICHLOROETHYLENE	G	G	G	U	UU	GU	E	E	E	
TRICHLOROACETIC ACID	G	G	E	U	UU	GU	E	E	E	
TRICHLOROETHANE	G	E	E	U	UU	GU	E			
TRICRESYL PHOSPHATE			G	U	UU	GU	E			
TRIETHANOLAMINE	G	G	G	P	GU	GU	E	E		
TRIETHYLAMINE			G	E	GU	GU	E	E		
TRISODIUM PHOSPHATE	G	G	E	E	GU	GU	E	E		
TUNG OIL	G	G	E	G	GU	GU	E			
TURBINE OIL #15								E		

E-EXCELLENT

G-GOOD

P-POOR

U-UNSATISFACTORY

N



